

AMC Dual Port Gigabit Ethernet Module

AMC202



KEY FEATURES

- AMC.1 compliant
- Single-width, half-height* (mid-height and full-height options available)
 - *Patent-pending design allows standard front panel I/O connectivity in a half-height AMC compliant form factor
- Two Gigabit Ethernet ports
- PCIe x4 lanes
- Optional fiber or copper front panel interface
- IPMI 2.0 compliant
- RoHS compliant
- OS support for:
 - Linux
 - Windows
 - Solaris
 - VxWorks

The AMC202 is a dual-port Gigabit Ethernet AdvancedMC™ (AMC). VadaTech offers this product in a single-width, half-height (options for mid-height and full-height, see ordering options) form factor based on the AMC.1 specification. The AMC202 provides two Gigabit Ethernet ports. The ports have options for either RJ-45s or fiber LC connectors. The LC connectors come with either SX or LX transceivers. Connectors such as the MT-RJ or VF-45 may also be substituted.

VadaTech can modify this product to meet special customer requirements without NRE (minimum order placement is required).

AdvancedMC™

AMC Dual Port Gigabit Ethernet Module

SPECIFICATIONS

Architecture		
Physical	Dimensions	Single-Width, Half-Height (with Mid or Full-Height options)
		Width: 2.89 in. (73.5 mm)
		Depth: 7.11 in. (180.6 mm)
Type	AMC GbE Module	Two port Gigabit Ethernet
		10/100/1000 Mbps operation - Copper
		1000 Mbps operation - Fiber
		IP, TCP, and UDP checksum offloading capabilities
Standards		
AMC	Type	AMC.1
Module Management	IPMI	IPMI Version 2.0
PCIe	Lanes	x4
Configuration		
Power	AMC202	3W
Environmental	Temperature	Operating Temperature: 0° to 65° C (Air flow requirement is to be greater than 200 LFM)
		Storage Temperature: -40° to +90° C
	Vibration	1G, 5-500Hz each axis
	Shock	30Gs each axis
	Relative Humidity	5 to 95 percent, non-condensing
Front Panel	Interface Connectors (See Ordering Options)	Two copper RJ-45 Connectors
		Two fiber LC Connectors with SX Transceivers (850nm)
		Two fiber LC Connectors with LX Transceivers (1310 nm)
		The AMC202 can be purchased with MT-RJ or VF-45 connectors (contact sales)
	LEDs	IPMI Management Control
		Activity and Link
	Mechanical	Hot Swap Ejector Handle
Software Support	Operating Systems	Linux, Windows, Solaris and VxWorks
Other		
MTBF	MIL Spec 217-F > 603,000 Hrs.	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Compliance	RoHS and NEBs	
Warranty	The AMC202 is warranted for a period of two (2) years.	
Trademarks and Logos	The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedMC™ and the AdvancedTCA™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.	
Notes	The Half-Height front panel is a patent-pending design. Contact your Sales representative for more information.	

AMC Dual Port Gigabit Ethernet Module

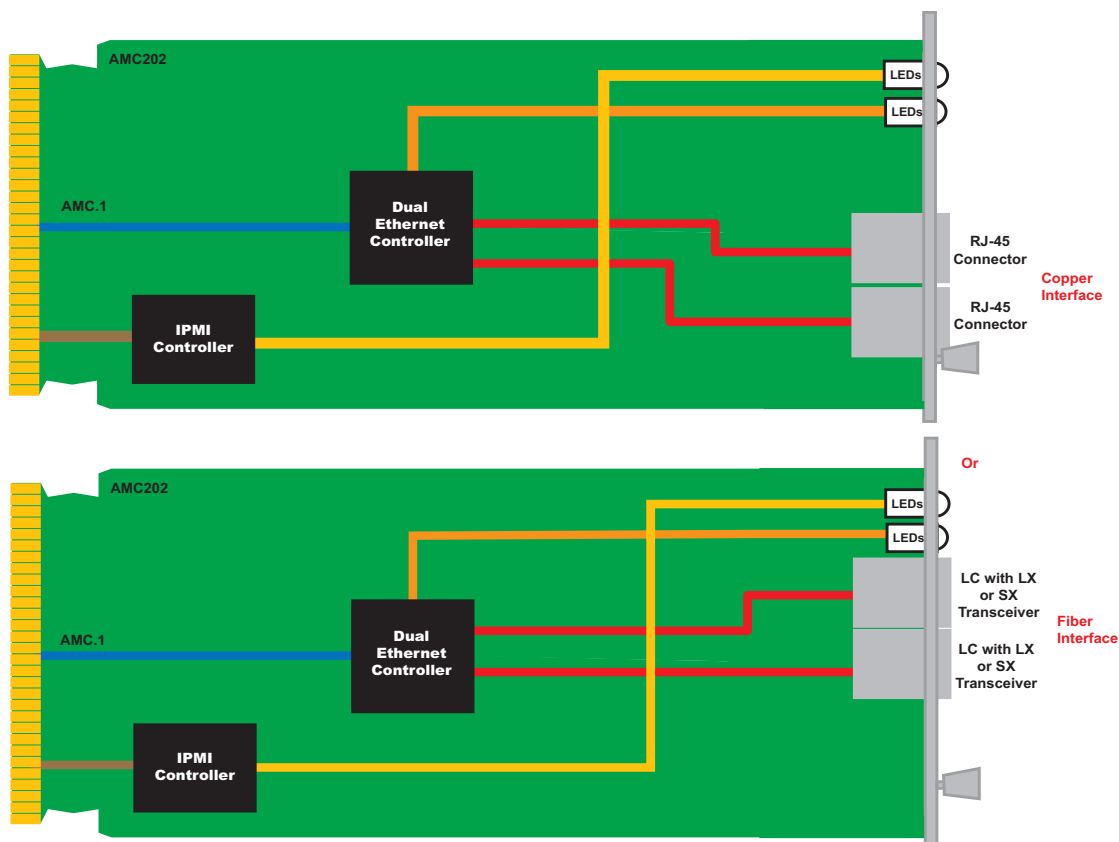


FIGURE 1. AMC202 Functional Block Diagram

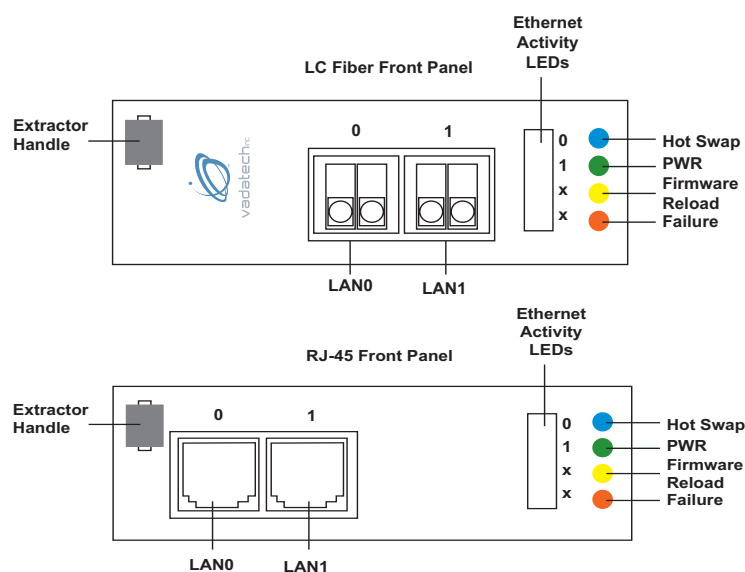


FIGURE 2. AMC202 Front Panels

AMC Dual Port Gigabit Ethernet Module

ORDERING OPTIONS

AMC202 - AOC - 000 - 00J

A = Front Panel Interface

- 1 = Copper RJ-45
- 2 = Fiber LC/SX (850nm)
- 3 = Fiber LC/LX (1310nm)

C = Front Panel Height

- 1 = Half-Height
- 2 = Mid-Height
- 3 = Full-Height

J = Conformal Coating

- 0 = None
- 1 = Humiseal 1A33 Polyurethane
- 2 = Humiseal 1B31 Acrylic



Document No _____ Date: June 17 2007

