

AMC217

10 Port Managed Layer 2 GbE Switch, AMC



AMC217

Key Features

- AMC.2 compliant
- Managed Layer 2 switch
- Octal 10/100/1000Base-T Ethernet via RJ-45 ports on the front panel
- Dual GbE routed to the rear
- Supports up to 8K MAC address
- Support for IEEE802.1Q VLANs
- VLAN-based packet filtering
- Packet classification using IEEE802.1p QoS
- 9K Jumbo frames
- Spanning tree
- Mirroring
- QoS
- SNMP and RMON
- OS support for: OS independent

Benefits

- Layer 2 switch with 8 front panel RJ-45 ports
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

AdvancedMC™



AMC217

The AMC217 is a single module, full-size AdvancedMC (AMC) based on the AMC.2 specification. The AMC217 provide 8 front panel 10/100/1000Base-T Ethernet ports via RJ-45. It has two additional GbE ports that are routed to the rear per the AMC.2 specification.

The switch is managed via telnet and supports a rich set of features such as VLAN, Spanning tree, QoS, Mirroring, etc.

VadaTech can modify this product to meet special customer requirements without NRE (minimum order placement is required).

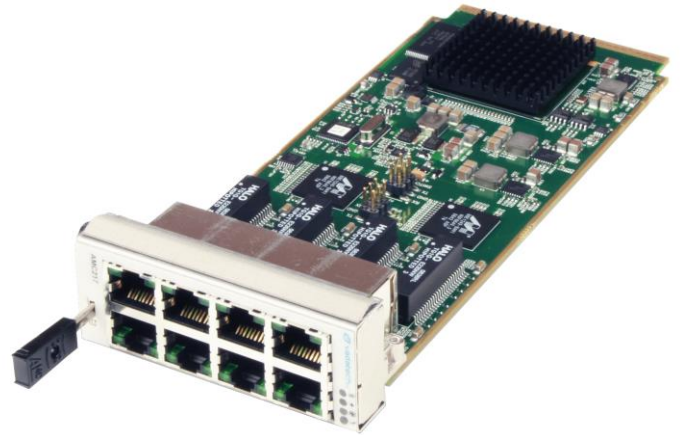


Figure 1: AMC217

Managed Layer 2 GbE

The GbE layer 2 managed switch fabric routes eight GbE to front panel and two to the rear.

Configuration

- Ethernet/IEEE 802.3 Packet size (64 bytes to 1522 bytes)
- Jumbo packets up to 9216 bytes

L2 Switching

- Supports up to 8K MAC address
- Line rate switching for all packet sizes
- Independent VLAN learning
- VLAN flooding for broadcast and DLF packets
- Hardware-based address learning
- Six CPU Managed Learning (CML) modes per port
- Hardware-and-software-based aging
- Software insertion/deletion/lookups of the L2 table
- Same port bridging supported
- Station movement control

L2 Multicast

- 4K VLANs
- Protocol-based VLANs
- IEEE 802.1p
- IEEE 802.1Q
- Independent VLAN learning (IVL)
- Ingress filtering for IEEE 802.1Q VLAN security
- VLAN-based packet filtering
- MAC-based VLAN

Source Port Filtering

- Egress port block masks
- Trunk group blocking masks

Storm Control Per-Port

- Unknown unicast packet rate control
- Broadcast packet rate control
- Multicast packet rate control

Spanning Tree

- IEEE 802.1D spanning tree protocol (single spanning tree per port)
- IEEE 802.1s for multi spanning trees
- IEEE 802.1w rapid spanning tree protocol-delete and/or replace per:
 - Port
 - VLAN
 - Port, per VLAN
- Spanning tree protocol packets detected and sent to the CPU

DoS Prevention

- Denial of Service detection/prevention

Double-Tagging

- Unqualified learning/forwarding
- IEEE 802.1 Q-in-Q

Mirroring

- Ingress/egress mirroring support
- Mirror-to-port receives the unmodified packet for ingress mirroring
- Mirror-to-port receives the modified packet for egress mirroring

Content Aware Filter Processing

- Intelligent Protocol Aware processor with backward-compatible, byte-based classification option
- Parses up to 128 bytes per packet
 - 512 ACL rules support
- Multiple matches and actions per packet
- ACL-based policing
- Ingress/egress port-based filtering
- MAC destination address remarking
- Traffic class definition based on the filter
- Programmable meters allow policing of flows
- Metering granularity from 64 Kbps to 1 Gbps
- Multiple look-ups per packet
- Metering support on ingress ports and CPU queues

QoS Features

- Four QoS queues per port
- Per-port, per QoS drop profiles
- Port level shaping
- Traffic shaping available on CPU queues
- Programmable priority to QoS queue mapping
- Provides two levels of drop precedence per queue
- Strict Priority (SP), Weighted Round Robin (WRR), and Deficit Round Robin (DRR) mechanisms for shaped queue selection

DSCP

- DSCP-based prioritization
- Back pressure metering
- DSCP to IEEE 802.1p mapping

Port Security

- Per port blocking
- Supports IEEE 802.1x
- MAC address blocking

Management Information Base

- SMON MIB, IETF RFC 2613
- RMON statistics group, IETF RFC 2819
- SNMP interface group, IETF RFC 1213, 2836
- Ethernet-like MIB, IETF RFC 1643
- Ethernet MIB, IEEE 802.3u
- Bridge MIB, IETF RFC 1493

Block Diagram

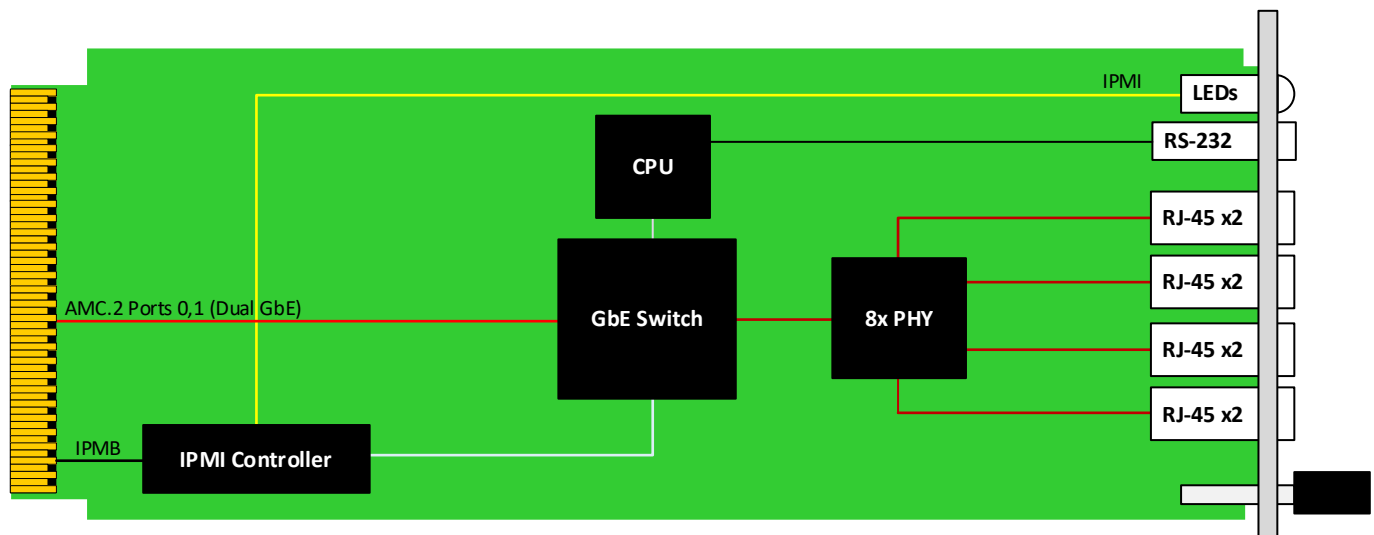


Figure 2: AMC217 Functional Block Diagram

Front Panel

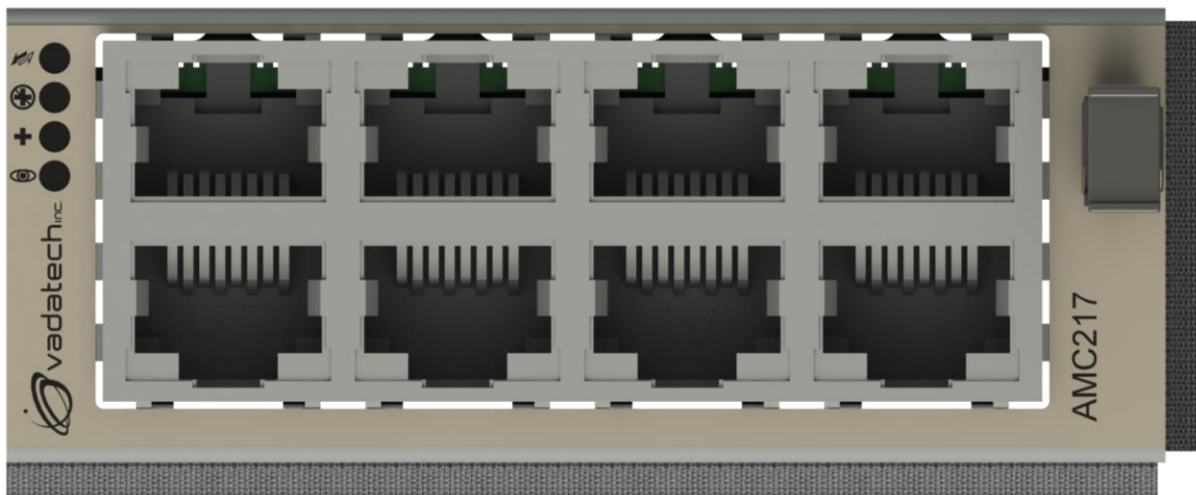


Figure 3: AMC217 Front Panel

Specifications

Architecture		
Physical	Dimensions	Single module, full-size
		Width: 2.89" (73.5 mm)
		Depth 7.11" (180.6 mm)
Type	AMC Ethernet	GbE Switch, 10 Ports (2 of GbE, 8 of 10/100/1000)
Standards		
AMC	Type	AMC.2
Module Management	IPMI	IPMI v2.0
1000Base-BX	Ports	0 and 1
Configuration		
Power	AMC217	8W
Environmental	Temperature	See Ordering Options and Environmental Spec Sheet
		Storage Temperature: -40° to +90°C
	Vibration	Operating 9.8 m/s ² (1G), 5 to 500 Hz
	Shock	30Gs on each axis
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	RJ-45 for 10/100/1000BaseT Ethernet
		LEDs IPMI management control
		Activity/Link user LEDs
	Mechanical	Hot-swap ejector handle
Software Support	Operating System	Independent
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

AMC217 – 00C-000-00J

C = Front Panel Size 1 = Reserved 2 = Reserved 3 = Full-size (6HP) 4 = Extended-Height (8HP)		J = Conformal Coating 0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane* 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic*

Related Products

AMC213



- Converts ports zero and one which are 1000Base-BX for GbE applications to Copper (1000Mbit)
- AMC.2 compliant (1000-BaseBX)
- GbE via RJ-45

AMC735



- Core processors from 8 to 16 and speeds from 800 MHz to 1.2 GHz
- Dual SFP+ socket supporting 10GbE
- PCIe Gen2 x4 or XAUI to Ports 4-7 and XAUI to Ports 8-11

UTC002



- 400 MHz CPU with 64 MB DDR for MCMC (MicroTCA Carrier Management Controller) and Shelf Manager
- Layer 2 managed GbE to each AMC (optional)
- Non-blocking PCIe Gen 3 (x4), to each slot with option for SRIO or 10 GbE (Layer 2 managed)

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.

DOC NO. 4FM737-12 REV 01 | VERSION 1.1 – OCT/25



vadatech
THE POWER OF VISION