

AMC590

ADC 8-bit @ up to 56 GSPS, 1/2/4
Channel, UltraScale™ XCKU115,
AMC



AMC590

Key Features

- Xilinx UltraScale™ XCKU115 FPGA
- ADC 8-bit @ up to 56 GSPS
- 1 x 56, 2 x 28 or 4 x 14 GSPS channels
- 24 GB of DDR4 Memory (3 banks of 64-bit)
- ADC is 65 nm CMOS process technology
- Very low power consumption (5W for the ADC)
- Single module, mid-size or full-size
- Calibration warning and over-range flags
- -3 dB analog input bandwidth nominally 15 GHz
- Internal 14 GHz VCO/PLL per I/Q ADC pair
- Differential analog input: 1.0V PPD

Benefits

- Highest sampling rate for the module size in the industry
- Uses MB8AC2070 ADC
- Low power consumption CMOS process technology
- Flexible selection of sample rate and channel count
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION

AdvancedMC™



AMC590

The AMC590 uses the Fujitsu MB8AC2070 ADC (Analog to Digital Converter) to provide 56 GSPS from a single channel, 28 GSPS from two channels, or 14 GSPS from four channels (user selectable). The board is compliant to the AMC.1 and AMC.2 specifications.

The AMC590 allows the implementation of extremely fast, high-resolution ADCs in CMOS process technology. The ADC is ideal for applications that require ultra-high-performance analog and digital processing such as 100G applications. Achieved input bandwidth depends on system configuration and operating conditions, contact VadaTech for details.

The AMC590 features a Xilinx UltraScale™ XCKU115 FPGA with 5520 DSP Slices. The FPGA interfaces directly to the AMC and allows the core to interface to the host with multiple protocols such as 40GbE, 10GbE, PCIe or SRIO. The FPGA has 3 banks of 64-bit DDR4 memory (24 GB total).

See [Solution Brief](#) for an overview of a 56 GSPS digitizer with IRIGB/GPS timestamping.



Figure 1: AMC590

Block Diagram

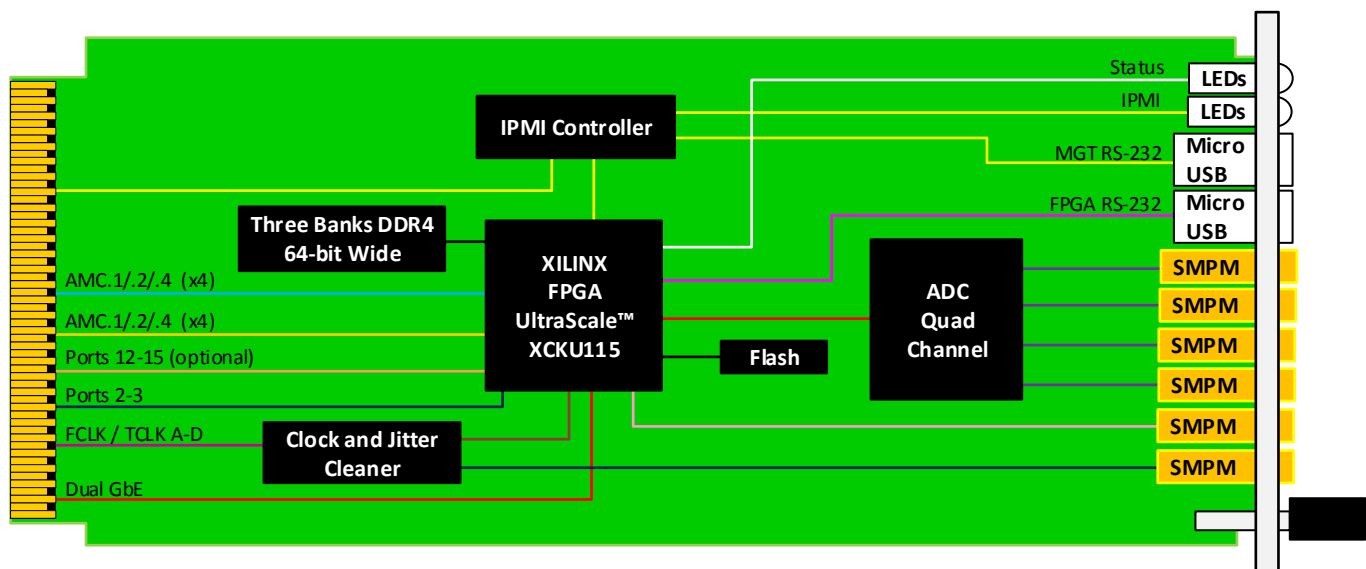


Figure 2: AMC590 Functional Block Diagram

Front Panel

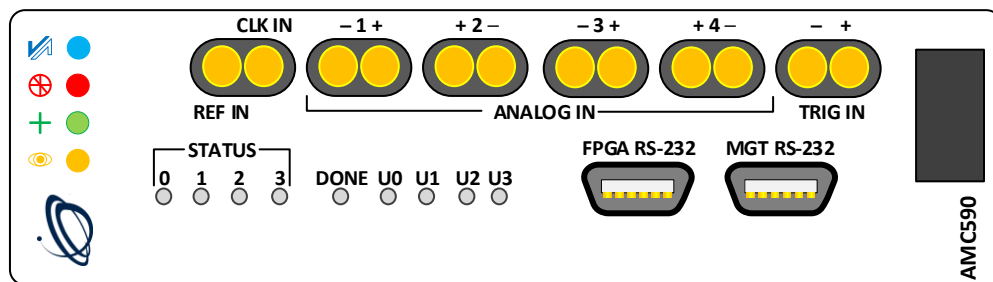


Figure 3: AMC590 Front Panel

Specifications

Architecture		
Physical	Dimensions	Single module, Mid-size (full-size, 8 HP optional)
		Width: 2.89" (73.5 mm)
		Depth 7.11" (180.6 mm)
Type	AMC ADC	ADC, up to 4 input channels, quad 14 GSPS or dual 28 GSPS or single 56 GSPS
Standards		
AMC	Type	AMC.1, AMC.2
Module Management	IPMI	IPMI v2.0
PCIe	Lanes	x4 or x8 (Ports 4-11), additional Ports on 12-15
SRIO/XAUI	Lanes	Dual x4 (Ports 4-11), additional Ports on 12-15
40GbE	Lanes	Dual x4 (Ports 4-11), additional Ports on 12-15
Configuration		
Power	AMC590	~65W (application specific)
Environmental	Temperature	See Ordering Options and Environmental Spec Sheet
		Storage Temperature: -40° to +85°C
	Vibration	Operating 9.8 m/s ² (1G), 5 to 500 Hz on each axis
	Shock	Operating 30Gs on each axis
Electrical	Relative Humidity	5 to 95% non-condensing
	DNL/INL	+/- 0.5 LSB, +/-1.0 LSB
	SNDR	40 dBFS @ Fin – 1 GHz, 36 dBFS @ Fin = 17 GHz
	Output Rate	128 samples x 8 bit @ 437.5 MHz
Front Panel	Signals	<100 fs RMS jitter, <500 fs I/Q sample time error
	Interface Connectors	SMPM: Differential input for each channel, Trig IN as a differential, CLK IN, REF IN
		Micro USB for MGT RS-232 and FPGA RS-232
	LEDs	IPMI management control
Software Support	Mechanical	4 Debug (user defined), 4x status and 1 Done LEDs
		Hot-swap ejector handle
		Operating System
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

AMC590 – A0C-DE0-00J

A = RF Direct Clock Synthesis 0 = Front Panel 1 = Onboard Wideband PLL	D = PCIe Option 0 = No PCIe 1 = PCIe on Ports 4-7 2 = PCIe on Ports 8-11 3 = PCIe on Ports 4-11	
	E = Ports 12-15 to FPGA 0 = No 1 = Yes	
C = Front Panel Size 1 = Reserved 2 = Mid-size 3 = Full-size 4 = Reserved 5 = Mid-size, MTCA.1 (captive screw) 6 = Full-size, MTCA.1 (captive screw) 7 = 8 HP		J = Temperature Range and Coating 0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane* 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic*

Notes:

*Conduction cooled; temperature is at edge of module.

For operational reasons VadaTech reserves the right to supply a higher speed FPGA device than specified on any particular order/delivery at no additional cost, unless the customer has entered into a Revision Lock agreement with respect to this product.

Related Products

AMC104



- AMC PCIe Gen 3 carrier (x4 or x8)
- Double module, full-size
- Accept any standard PCIe edge style module

AMC626



- Host Bus Adapter (HBA) for external SATA III (6.0 Gbps) or SAS-3 (12 Gbps) drives
- AMC.1 compliant, PCIe Gen3 x8 or x4
- Support for 8 SAS/SATA Ports

VT899



- 7U MTCA Cube
- 5" x 7U x 9" deep (with handles 10" deep)
- Up to six AMCs: 6 full size single module or 3 full size double module

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

