


AMC624

2.5" Dual/Single SATA III Drive,
6 Gbps

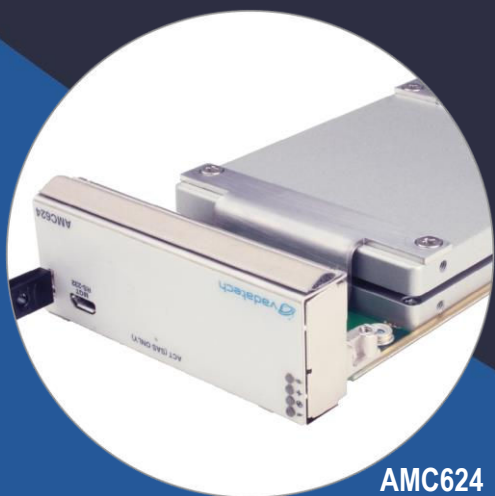

AMC624

Key Features

- 2.5" SATA III 6.0 Gbps drive (can support legacy 1.5 and 3 Gbps)
- Single module, mid-size for single disk or full-size for dual disk
- AMC.3 compliant
- Option for Solid State Drive or Rotary Disk

Benefits

- 6 Gbps SATA drive provides twice the front-end transfer rate as previous VadaTech modules
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

AdvancedMC™



vadatech
THE POWER OF VISION



AMC624

The AMC624 is designed specifically for dual or single 2.5" SATA III hard disk drive that allows speeds of 6 Gbps based on the latest specification. The single module, mid-size AdvancedMC™ (AMC) form factor is based on the AMC.3 specification.

The Unit is an ideal AdvancedMC™ storage module for high speed requirements at a lower cost. The single disk option supports a mid-size front panel and can route to Port 2 or Port 3. Standard 8 HP front panel size is also available.



Figure 1: AMC624

Block Diagram

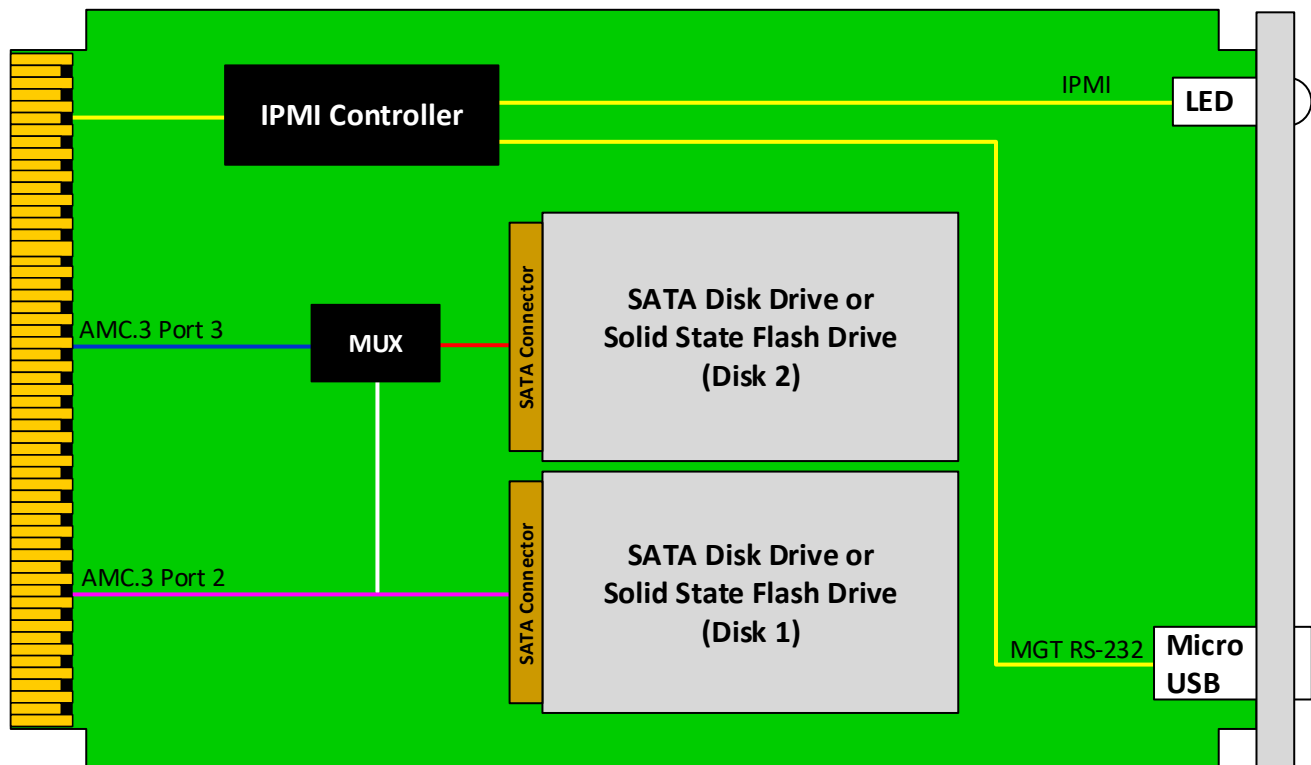


Figure 2: AMC624 Functional Block Diagram

Front Panel



Figure 3: AMC624 Front Panel (Mid-size)

Specifications

Architecture		
Physical	Dimensions	Single module, mid-size (full-size optional)
		Width: 2.89" (73.5 mm)
		Depth: 7.11" (180.6 mm)
Type	AMC Storage	2.5" Serial ATA III Drive
		Solid State Drive and Rotary Disk option
		SATA III transfer rate of 6 Gbps
Standards		
AMC	Type	AMC.3
Module Management	IPMI	IPMI v2.0
Configuration		
Power	AMC624	~1W without the drive
Environmental	Temperature	See Ordering Options and Environmental Spec Sheet
		Storage Temperature: -40° to +70°C
	Vibration	SSD/Rotary disk dependent
	Shock	SSD/Rotary disk dependent
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	Micro USB for IPMI management control (RS-232)
	LEDs	IPMI management control
	Mechanical	Hot swap ejector handle
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

AMC624 – ABC-D00-0HJ

A = SATA Drive Capacity Disk 1	D = Port 3 Routing	
0 = No Disk 1 = 1 TB 2 = 2 TB 3 = Reserved 4 = Reserved 5 = Solid State Drive (SSD) and other sizes	0 = Port 3 routed to the second disk 1 = Port 3 routes to the first disk (Disk two is not installed and panel can stay as mid-size)	
B = SATA Drive Capacity Disk 2		H = Temperature Range**
0 = No Disk 1 = 1 TB 2 = 2 TB 3 = Reserved 4 = Reserved 5 = Solid State Drive (SSD) and other sizes		0 = Commercial (-5 to +55°C) 1 = Industrial (-20 to +70°C) 2 = Extended (-40 to +85°C)***
C = Front Panel		J = Conformal Coating
1 = Compact* 2 = Mid-size 3 = Full-size* 4 = Extended (8 HP)		0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Notes: *Dual disk must take the Full-size panel. Compact requires SSD as option A.

**SSD option is required for Industrial or Extended grade

***Conduction cooled; temperature is at edge of module. Consult factory for availability.

Related Products

UTC002



- 400 MHz CPU with 64 MB DDR for MCMC and Shelf Manager
- Layer 2 managed GbE to each AMC (optional)
- Non-blocking PCIe Gen 3 (x4), to each slot with option for SRIO or 10GbE (Layer 2 managed)

UTC020



- Single module, full-size per AMC.0
- Dual -36V DC to -75V DC input, 936W (available in 468W)
- Hot swappable with support for power module redundancy

VT866



- MTCA System Platform 19" x 5U x 17"
- Full redundancy with dual MicroTCA Carrier Hub (MCH), dual Cooling Units and quad Power Modules
- Up to 12 AMCs in single width/full-size

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

