


A201S

M-Module Carrier Board for 4 Mezzanine Cards

6U VMEbus


- » 4 M-Module slots
- » 1 VMEbus slot
- » VMEbus slave A16/A24/D16, interrupter
- » -40 °C to +85 °C (depending on model)

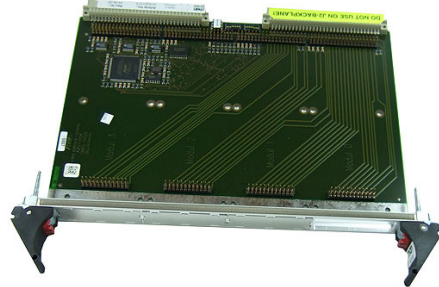

The A201S is an M-Module carrier board for universal I/O on the VMEbus, allowing high flexibility in applications such as process and motion control, measuring and instrumentation, communication or special-purpose tasks.

The M-Modules are screwed tightly on the carrier board, but the board needs only one slot on the VMEbus.

Please note that since all three rows of the P2 connector are used for user I/O, board models with this connector are not compatible with VME64 backplanes. An interrupt controller handles the M-Modules individually. In VMEbus D16 systems the I/O signals of the M-Modules can be accessed from P2/J2 inside the rack.

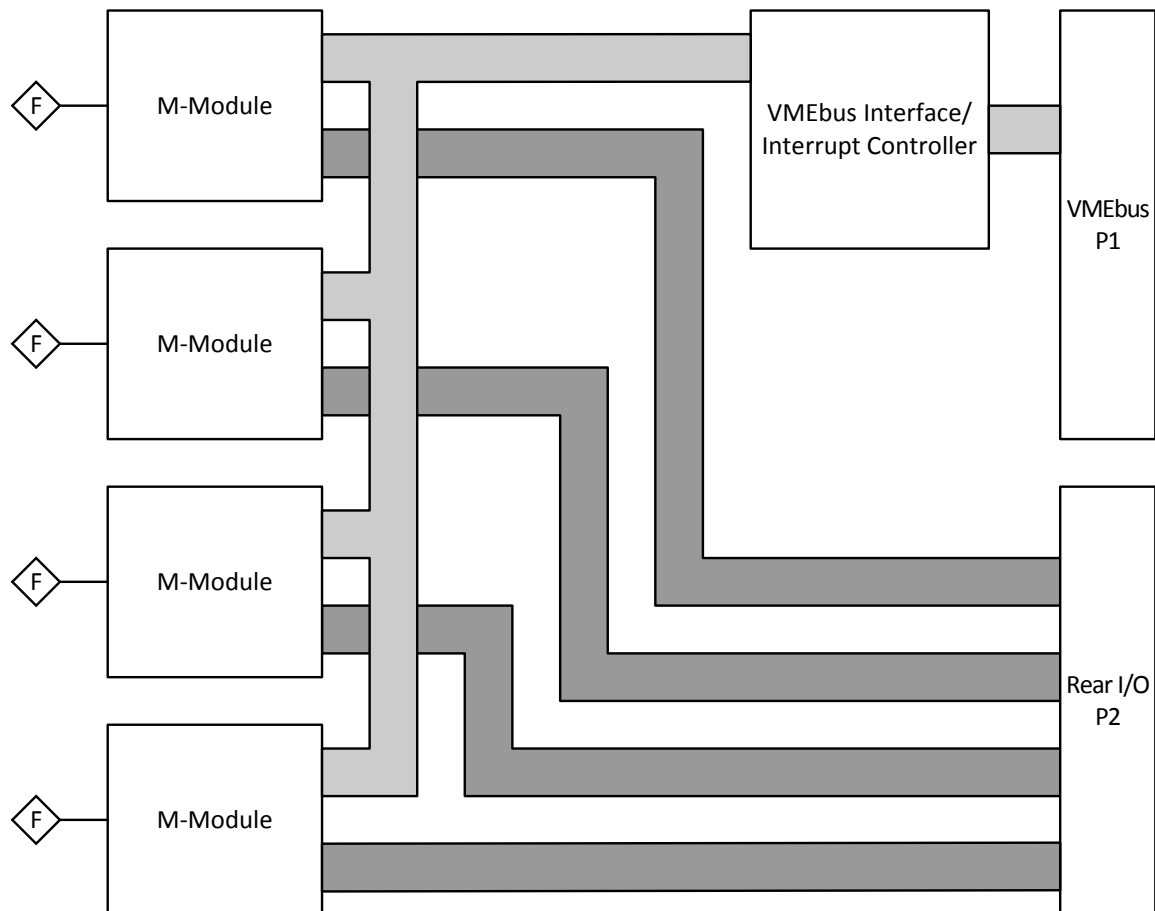

Mezzanine Slots

- Four M-Module slots
- Compliant with M-Module standard
- Characteristics: D08, D16, A08, INTA, INTC

Interrupt Controller

- Interrupt handling individually for each M-Module
- Functional compatibility with A201N

Peripheral Connections

- Via front panel
- Via 96-pin P2 connector (rear I/O)

VMEbus

- Only one slot required on the VMEbus
- Models with P2 connector not compatible with VME64 backplanes (row B of the P2 connector is used for user I/O)
- Slave D08(EO):D16:A16:A24
- Interrupter D08(O)

Electrical Specifications

- Supply voltage/power consumption: +5 V (-3%/+5%), 320 mA typ. (without M-Modules)

Mechanical Specifications

- Dimensions: standard double Eurocard, 233.3 mm x 160 mm
- Front panel: aluminum with 2 handles, cut-outs for front connectors of 4 M-Modules
- Weight: 220 g

Environmental Specifications

- Temperature range (operation):
 - 0 °C to +60 °C or -40 °C to +85 °C
 - Airflow: min. 10 m³/h
- Temperature range (storage): -40 °C to +85 °C
- Relative humidity range (operation): max. 95% without condensation
- Relative humidity range (storage): max. 95% without condensation
- Altitude: -300 m to + 3000 m
- Shock: 15 g / 11 ms
- Bump: 10 g / 16 ms
- Vibration (sinusoidal): 2 g / 10 Hz to 150 Hz

MTBF

- 430 000 h @ 50 °C (derived from MIL-HDBK-217F)

Safety

- Flammability (PCBs): UL 94 V-0

EMC

- Tested according to EN 55022 (radio disturbance), IEC 61000-4-2 (ESD) and IEC 61000-4-4 (burst)

Software Support

- M-Module drivers for Windows, VxWorks, Linux, QNX as supported
- **Basic board driver included in MDIS system package for the respective operating system**

Germany

duagon Germany GmbH

Neuwieder Straße 1-7
90411 Nuremberg
Phone +49 911 99 335 0

sales-deu@duagon.com
www.duagon.com

USA

MEN Micro Inc.

860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone +1 215 542 9575

sales-usa@duagon.com
www.duagon.com

France

MEN Mikro Elektronik SAS

18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 450 955 312

sales-fra@duagon.com
www.duagon.com

China

MEN Mikro Elektronik Co., Ltd.

Jinjiang Xiangyang Tower
200040 Shanghai
Phone +86 159 0077 2985

sales-chn@duagon.com
www.duagon.com

Up-to-date information, documentation and ordering information:
www.duagon.com/products/a201s/

duagon is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication. duagon expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of duagon products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of duagon products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by duagon and the customer. Should the customer purchase or use duagon products for any unintended or unauthorized application, the customer shall indemnify and hold duagon and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that duagon was negligent regarding the design or manufacture of the part.

In no case is duagon liable for the correct function of the technical installation where duagon products are a part of.

© 2020 duagon Germany GmbH

Contact

