

FULLY MANAGED 29 GBIT/S INDUSTRIAL ETHERNET SWITCH, A-CODED

- Fully managed rugged Ethernet switch
- 24 Gigabit Ethernet ports
- Or 24 Gigabit Ethernet ports plus 2.5 Gigabit SFP port
- 29 Gbit/s carrier grade switch matrix
- -40 °C to +85 °C
- EN 50155 compliant (railways)
- PICMG CPCI-S.0 CompactPCI Serial system slot and peripheral card



A FLEXIBLE SWITCH IN A COMMON MODULAR FORMAT

The G101 is a fully managed 3U flexible multiport Gigabit Switch, with a 29 GBit/s switch matrix, implemented as a CompactPCI Serial board. It occupies one system slot or one peripheral slot using a 4 HP front panel with two Gigabit Ethernet ports on RJ45 connectors and one 2.5 Gb SFP cage. Alternatively, the G101 can be supplied with three M12 A-coded connectors on the front panel. A good alternative for a version with M12 X-coded connectors is the G102. The intelligent backplane concept for duagon switches allows high flexibility in network applications and management.

HIGH SPEED, HIGH EFFICIENCY AND EXTENSIVE PROTOCOLS

The G101 guarantees high speed, high efficiency and an extensive firmware supporting various protocols like security, time synchronicity, stability, as well as for temperature needs. The switch supports EEE (Energy Efficient Ethernet) and IEEE1588v2 as a standard on all ports.

VARIOUS CONNECTION POSSIBILITIES DUE TO VARIOUS PORT OPTIONS

The G101 features three Ethernet ports on the front. Alternatively these are available on the rear, where a total of 24 ports is possible. These include 12 ports with integrated 10/100/1000 Mbit/s copper PHYs. For the configuration of additional ports controlled via the backplane duagon offers a number of different line cards. In addition, the G101 features a high performance port with up to 2.5 Gbit/s for an SFP pluggable module to support a high-speed uplink.

INCREASED RELIABILITY THANKS TO BUILT-IN TEST MECHANISMS

The switch is fault tolerant and restores itself on its own: If a link is temporarily unavailable, frames can be sent via backup/redundant links (spanning tree protocol/link aggregation) and no data loss occurs. Its built-in test mechanisms make the G101 an even more reliable component in the communication system.

RUGGED AND COMPLIANT TO RAILWAY STANDARDS


The railway Ethernet switch is specifically designed for rugged rolling-stock communication systems. It is fully compliant with the EN 50155 railway standard and qualified for a -40 °C to +85 °C operating temperature.



www.duagon.com/products/g101/

DATA SHEET

G101 | DIAGRAM

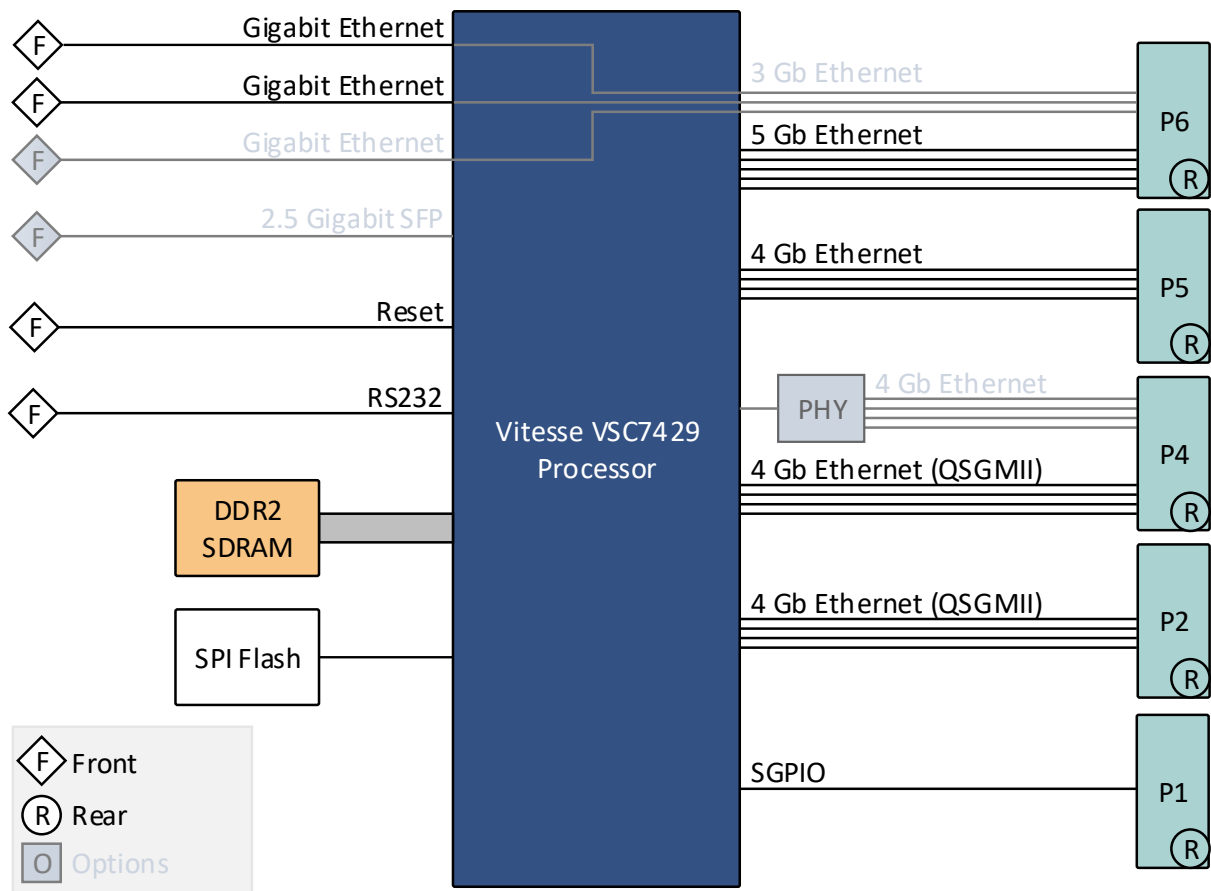

G101 | TECHNICAL DATA

SWITCH KEY FEATURES

- Switching matrix
 - Total switching capacity of chipset: 29 Gbit/s
 - MAC address table size: 8192
 - Switching algorithm: Store-and-forward, TCAM high-speed (Ternary Content-Addressable Memory)
- General network support
 - IPv4
 - IPv6
 - IPv6 Ready Logo approved
- Protocols and functionality
 - DHCP ARP inspection
 - DHCP Option 82
 - DHCP Server/Client
 - DHCP snooping
 - DNS Client (RFC 2136)
 - DNS Proxy (RFC 5625)
 - IEEE 1588v2 PtP
 - One-step and two-step clocks
 - Transparent clock



- Ports and port control
 - Energy Efficient Ethernet (IEEE 802.3az)
 - ETH Signal Equalization and Power Control
 - Inband management (VRAP)
 - Port frame size (Jumbo Frames: 9216 bytes/packet max.)
 - Port state (admin), speed, duplex mode and flow control
 - Port status (link monitoring) and statistics (MIB counters)
 - Port VeriPHY (cable diagnostics), ActiPHY and PerfectReach
- User configuration interfaces
 - Command line interface (CLI) via console, SSHv2, Telnet
 - Web interface (HTTP/HTTPS) via IPv4, IPv6
- See the firmware product page for more information on the switch firmware features.
 - www.duagon.com/products/software/14etsw-01/#specs (14ETSW-01, Gen 1)
 - www.duagon.com/products/software/14etsw-02/#specs (14ETSW-02, Gen 2)

INTERFACES

- This product includes interface options
 - Different front connectors
- Ethernet
 - 2x 1000BASE-T, RJ45, receptacle
 - 1x 2500BASE-SX SFP transceiver cage (uplink)
 - 3x 1000BASE-T, M12, A-coded, receptacle
 - 24x 1000BASE-T, backplane
 - 24 backplane ports is the maximum configuration possible in combination with line cards.
 - For possible combinations contact duagon.
- Serial
 - 1x RS232, RJ45, receptacle
- Serial GPIO (SGPIO)
 - One channel, compliant with SFF 8485 specification
- LED
 - Status: board status
 - Ethernet: activity, link
- Dongle interface (only on models with M12 connectors)

TESTED SFP TYPES

- CISCO GLC-SX-MM, 1 Gbit/s BASE-SX, 220/500 m, 0 to +70°C
- AVAGO ABR-5710 ALZ, 1 Gbit/s BASE-SX, 250/550 m, -40 to +85°C
- Finisar FTLF8519P3BTL, 1 Gbit/s BASE-SX, 300/500 m, -40 to +85°C
- Finisar FTLF1318P3BTL, 1 Gbit/s BASE-LH, 10 km, -40 to +85°C
- Finisar FTLF1518P1BTL, 1 Gbit/s BASE-ZX, 80 km, -40 to +85°C
- AVAGO ABR-57R5APZ, 4.25 Gbit/s BASE-SX, 300 m @ 2.125 Gbit/s, -10 to +85°C

SUPERVISION AND CONTROL

- Temperature measurement
- Watchdog timer

PRODUCT STANDARD

- CompactPCI Serial: CompactPCI Serial PICMG CPCI-S.0 Specification
 - Based on CompactPCI Specification PICMG CPCI-S.0 with duagon switch extensions
 - System or peripheral slot

ELECTRICAL SPECIFICATIONS

- Supply voltage
 - +12 V (9.5 V to 15.5 V)
- Power consumption: 16 W max.
- Isolation voltage for Ethernet
 - IEE802.3 (2012), Section 1; 9.7 Electrical Isolation - Environment B

MECHANICAL SPECIFICATIONS

- Dimensions: 3U, 4 HP
- Weight: 192 g (model 02G101-00)
- Cooling
 - Air cooling, forced convection, airflow 1.5 m/s

PRODUCT COMPLIANCE: RAIL - ROLLING STOCK

- Operating temperature: -40 °C to +85 °C (EN 50155, class TX)
- Storage temperature: -40 °C to +85 °C



- Altitude: -300 m to +2000 m
- Relative humidity (operation): max. 95% non-condensing
- Relative humidity (storage): max. 95% non-condensing
- Shock: 30 ms @ 50 m/s² (EN 61373:2010/AC:2017-09, vehicle body, cat. 1, class B)
- Vibration (Function): 1 m/s², 5 Hz to 150 Hz (EN 61373)
- Vibration (Lifetime): 7.9 m/s², 5 Hz to 150 Hz (EN 61373)
- Electrical Safety
 - EN 50155 (insulation, voltage)

- Flammability (PCBs)
 - UL 94 V-0
- EMC
 - EN 55022 (radio disturbance)
 - EN 61000-4-2 (ESD Immunity)
 - EN 61000-4-4 (burst)

RELIABILITY

- MTBF: 692 753 h @ 40 °C according to IEC/TR 62380 (RDF2000)


G101 | ORDERING INFORMATION

STANDARD MODELS

- | | |
|------------------|---|
| 02G101-12 | 25-port managed Gigabit Ethernet switch, 2x RJ45 + 1x SFP 2.5 Gbit/s on front, 10x Gb Ethernet + 3x QSGMII, Gen 2 management firmware, -40 °C to +85 °C |
| 02G101-13 | 24-port managed Gigabit Ethernet switch, 3x M12 A-coded on front, 9x Gb Ethernet + 3x QSGMII on backplane, Gen 2 management firmware, -40 °C to +85 °C, conformal coating |



LEADING THE EMBEDDED FUTURE

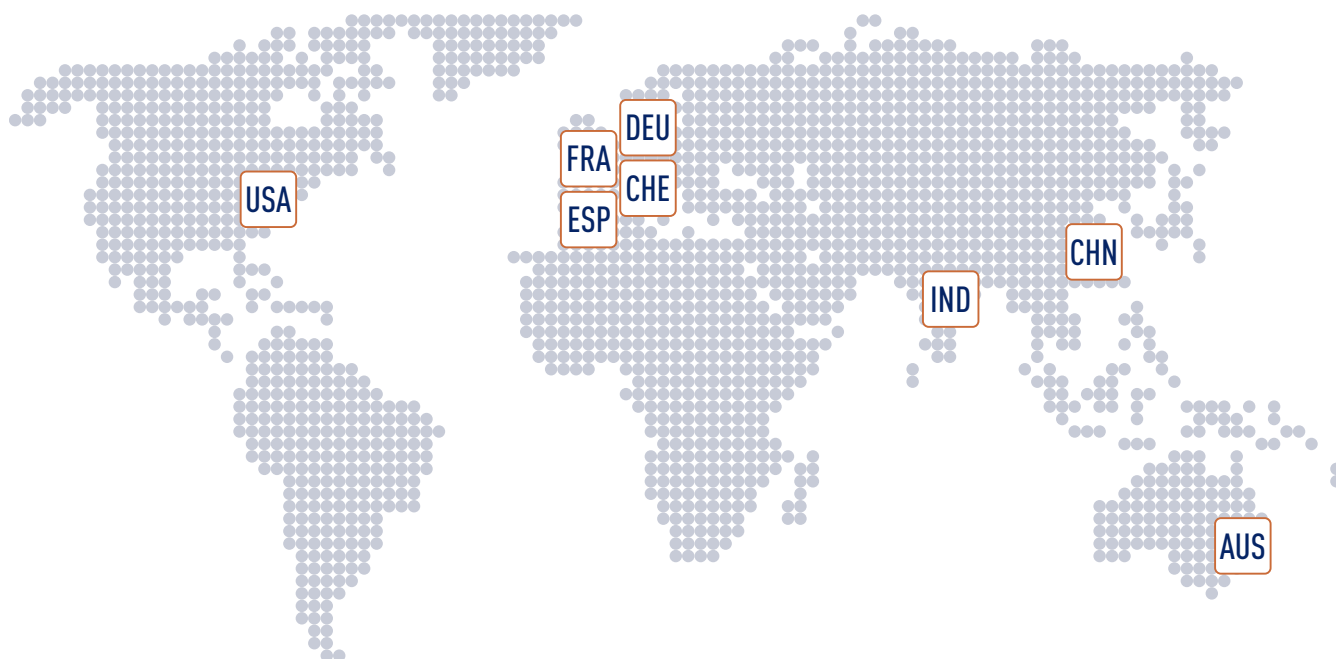

duagon | WORLDWIDE

duagon has a global presence with support and sales representatives across 8 countries. With three decentralized engineering and production sites, our customers take advantage of the added competence and flexibility.

www.duagon.com

SWITZERLAND (HQ)

Dietikon
Phone +41 44 743 73 00
sales@duagon.com

AUSTRALIA

Artarmon
Phone +61 2 9966 9424
sales-aus@duagon.com

CHINA

Shanghai
Phone +86 159 0077 2985
sales-chn@duagon.com

FRANCE

Gaillard
Phone +33 450 955 312
sales-fra@duagon.com

GERMANY

Nuremberg
Phone +49 911 99 335 0
sales-deu@duagon.com

INDIA

New Delhi
Phone +91 11 41 61 12 48
sales-ind@duagon.com

SPAIN

Madrid
Phone +34 917 880 610
sales-esp@duagon.com

USA

Blue Bell
Phone +1 215 542 9575
sales-usa@duagon.com