

MODULAR GATEWAY COMPUTER WITH INTEL ATOM PROCESSOR FOR INDUSTRIAL GATEWAYS

- Intel Atom E3900 series
- Up to 8 GB DDR3 RAM with ECC
- Trusted Platform Module
- M.2 NVMe slot for storage
- Gb Ethernet, USB 3.2 Gen 1x1, RS232, RS485/422, DisplayPort
- DIN rail, wall or 19" rack mounting
- Input voltage 24 V DC nom. or 48 V DC nom. with ignition
- Full range power supply 16 V DC to 60 V DC
- -40 °C to +70 °C, fanless



LOW POWER CPU FOR IOT/NETWORK APPLICATIONS

The MC50I is a modular computer for embedded applications in industrial automation. The computing platform features an Intel Atom E3900 series CPU with low power dissipation and scalability in performance and memory.

The MC50I is the ideal basis for functions such as security gateway, predictive maintenance or CCTV, or to act as a diagnostics server.

MODULAR SYSTEM FOR EASY CONFIGURATION

The MC50I can be a stand-alone product, but due to the modular concept it offers flexible built-to-order configurations. The box can be easily combined with prefabricated extension modules, providing additional features and short delivery times.

In the modular system, the data transfer between the modules as well as the power distribution between the individual modules takes place via the extension connectors standardized by duagon.

Extension modules can provide application-specific functions like wireless communication (LTE advanced, WLAN, GNSS), CAN bus, or other I/O. A removable storage shuttle can support the integration of a 2.5" SATA HDD/SSD.

POWER SAVING DESIGN AND SECURITY FEATURES

The board management controller provides enhanced reliability and reduced downtime. The Trusted Platform Module supports

security and encryption features. With the ignition switch for remote control of booting and shutdown, the platform provides additional features for power saving.

FLEXIBLE SYSTEM INSTALLATION

Various mounting options facilitate the integration of the box into an existing environment. The standard 35 mm DIN Rail mounting offers space saving mounting of all system modules on a single rail. Wall mounting and mounting in a 19" rack using adaption brackets are an option.

The aluminum housing with cooling fins allows fanless operation. MC50I has no moving parts, making it maintenance free.

WAYSIDE QUALIFIED AND LONG-TERM AVAILABILITY


The CPU module is qualified for wayside and information technology applications. Long term availability until 2027 minimizes life-cycle management by making the MC50I available at least for this period of time.



www.duagon.com/products/mc50i/

DATA SHEET

MC50I | DIAGRAM

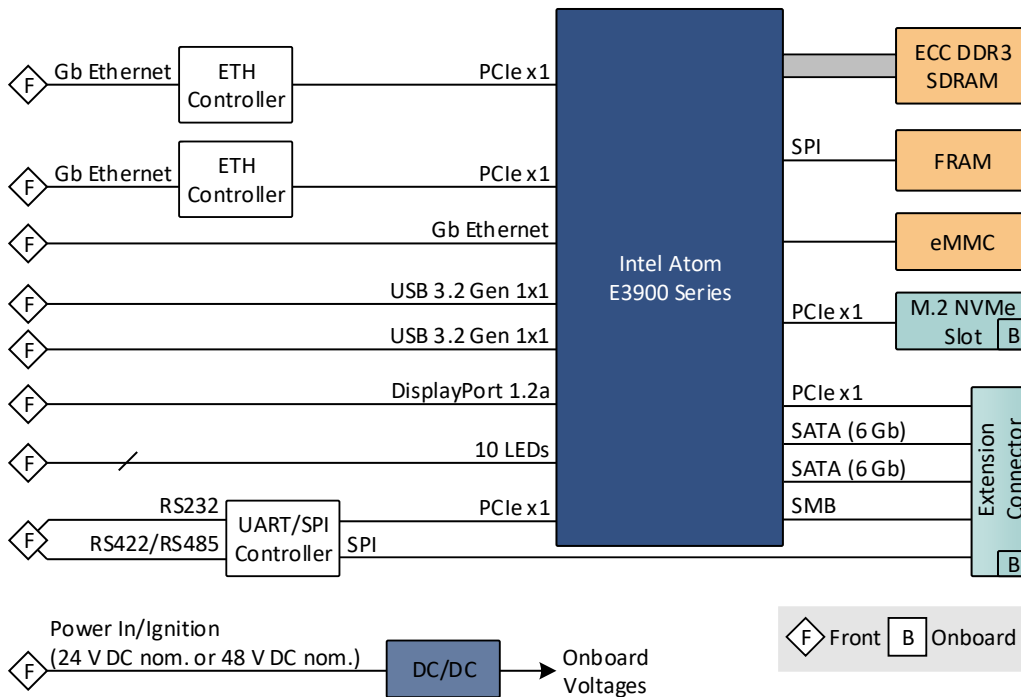

MC50I | TECHNICAL DATA

CPU

- The following CPU types are supported:
 - Intel Atom x5-E3930, 2 cores, 2 threads, 1.3 GHz, 1.8 GHz Turbo Boost, 6.5 W, 2 MB cache
 - Intel Atom x7-E3950, 4 cores, 4 threads, 1.6 GHz, 2.0 GHz Turbo Boost, 12 W, 2 MB cache

MEMORY

- System RAM
 - Soldered DDR3, ECC
 - 8 GB max.
- Non-volatile RAM (NVRAM): 64 Kbit (8 K × 8) FRAM

SECURITY

- Trusted Platform Module 2.0

MASS STORAGE

- eMMC (soldered); 64 GB max.

- The following mass storage devices can be assembled:
 - SSD M.2 (NVMe)

GRAPHICS

- Processor graphics
- Maximum resolution: 4096 x 2160 pixels @ 60 Hz, 24 bpp

INTERFACES

- SSD/HDD slot
 - 1 × M.2 2242/2260/2280 socket 3 Key M; NVMe (PCIe x1); internally accessible
- Video
 - 1 × DisplayPort 1.2, for service
- USB
 - 2 × USB 3.2 Gen 1x1, Type A, for service
- Ethernet
 - 3 × 10/100/1000BASE-T, RJ45



- Serial
 - 1 × RS232 isolated, D-Sub, 9-pin, plug
 - 1 × RS422/RS485, isolated, D-Sub, 9-pin, plug
- LED
 - Status: board status (BMC), power status
 - Ethernet: activity, link
 - User configurable: 2 ×
- Power
 - 1 × power in, COMBICON, 3-pin, plug
 - Ignition input
- Earthing connection
 - M4 screw

SUPERVISION AND CONTROL

- Board management controller
- Temperature measurement
- System watchdog (BMC)
- Ignition watchdog
- Real-time clock, buffered by supercapacitor (5 days)

ELECTRICAL SPECIFICATIONS

- Supply voltage
 - 24 V DC nom.
 - 48 V DC nom.
- Power consumption: 10 to 15 W typ. (depending on CPU type and CPU load), 40 W max. (including ME modules)

MECHANICAL SPECIFICATIONS

- Dimensions: (W) 42 mm, (D) 144 mm, (H) 132 mm
- Weight: 790 g approx.
- Mounting
 - DIN rail
 - Wall/flat surface
 - Rack in 19" cabinet
- Cooling: Air cooling, natural convection, airflow 0.4 m/s
- Protection rating: IP20

PRODUCT COMPLIANCE: RAIL - WAYSIDE NON-SAFETY RELATED

- Operating temperature: -40 °C to +70 °C (EN 50125-3:2003, class T2, cubicle, with class T2 maximum extended by 5 °C)

- Storage temperature: -40 °C (EN 60068-2-1:2007, Ab) to +85 °C (EN 60068-2-2:2007, Bb)
- Altitude: +3000 m max. (EN 50125-3:2003, class AX)
- Humidity: 100 % RH max. (EN 50125-2:2002, control cabinet, class T1/T2/TX)
- Shock: 11 ms @ 20 m/s² (EN 50125-3:2003, in a switch cabinet 1 m to 3 m from the track)
- Vibration: 2.3 m/s² (EN 50125-3:2003, in a switch cabinet 1 m to 3 m from the track)
- Electrical safety
 - EN 50124-1:2017
 - EN 62368-1:2014 + AC:2015
- EMC emission
 - EN 50121-4:2016
 - EN 61000-6-4:2007 + A1:2011
- EMC immunity
 - EN 50121-4:2016
 - EN 61000-6-2:2005
- Restrictions: Service interfaces may only be used with a maximum cable length of 3 m for installations 10 m or less away from the track.

PRODUCT COMPLIANCE: ROAD VEHICLE

- EMC emission: ECE R10 Rev.5
- EMC immunity: ECE R10 Rev.5

PRODUCT COMPLIANCE: INFORMATION TECHNOLOGY EQUIPMENT

- Operating temperature: 0 °C (EN 60068-2-1:2007, Ae, temperature value in compliance with 6.6 b) to +60 °C (EN 60068-2-2:2007, Be)
- Storage temperature: -40 °C (EN 60068-2-1:2007, Ab) to +85 °C (EN 60068-2-2:2007, Bb)
- Humidity: +55 °C and +25 °C, 90 % to 100 % RH (EN 60068-2-30:2005, Db)
- Electrical safety: EN 62368-1:2014 + AC:2015
- EMC emission: EN 55032:2015 (multimedia equipment), class A (industrial environments)
- EMC immunity: EN 55024:2010 + A1:2015 (information technology equipment)

RELIABILITY

- 400 000 h predicted @ 40 °C according to IEC/TR 62380 (RDF 2000)



BIOS/BOOT LOADER

- AMI Aptio UEFI Firmware

SOFTWARE SUPPORT

- Linux
 - Yocto BSP
 - Tested with: Yocto BSP (Sumo 2.5, Linux kernel 4.15),
Lubuntu 18.04 X LTS

- Windows
 - Windows 10 IoT Enterprise 64-bit
- Further Resources
 - See the product User Manual for details on software support: www.duagon.com/products/mc50i/#doc
 - See section Software on the product web page for available packages:
www.duagon.com/products/mc50i/#downl
 - See also Application Note *Recommendations for a Robust Software Setup*


MC50I | ORDERING INFORMATION

STANDARD MODELS

06MC50I10	Modular Computer, Intel Atom x5-E3930, 1.3 GHz, 2 GB DDR3 DRAM, 8 GB eMMC, 24 V DC nom. or 48 V DC nom., -40 °C to +70 °C
06MC50I11	Modular Computer, Intel Atom x5-E3930, 1.3 GHz, 4 GB DDR3 DRAM, 16 GB eMMC, 24 V DC nom. or 48 V DC nom., -40 °C to +70 °C
06MC50I12	Modular Computer, Intel Atom x7-E3950, 1.6 GHz, 8 GB DDR3 DRAM, 16 GB eMMC, 24 V DC nom. or 48 V DC nom., -40 °C to +70 °C



LEADING THE EMBEDDED FUTURE

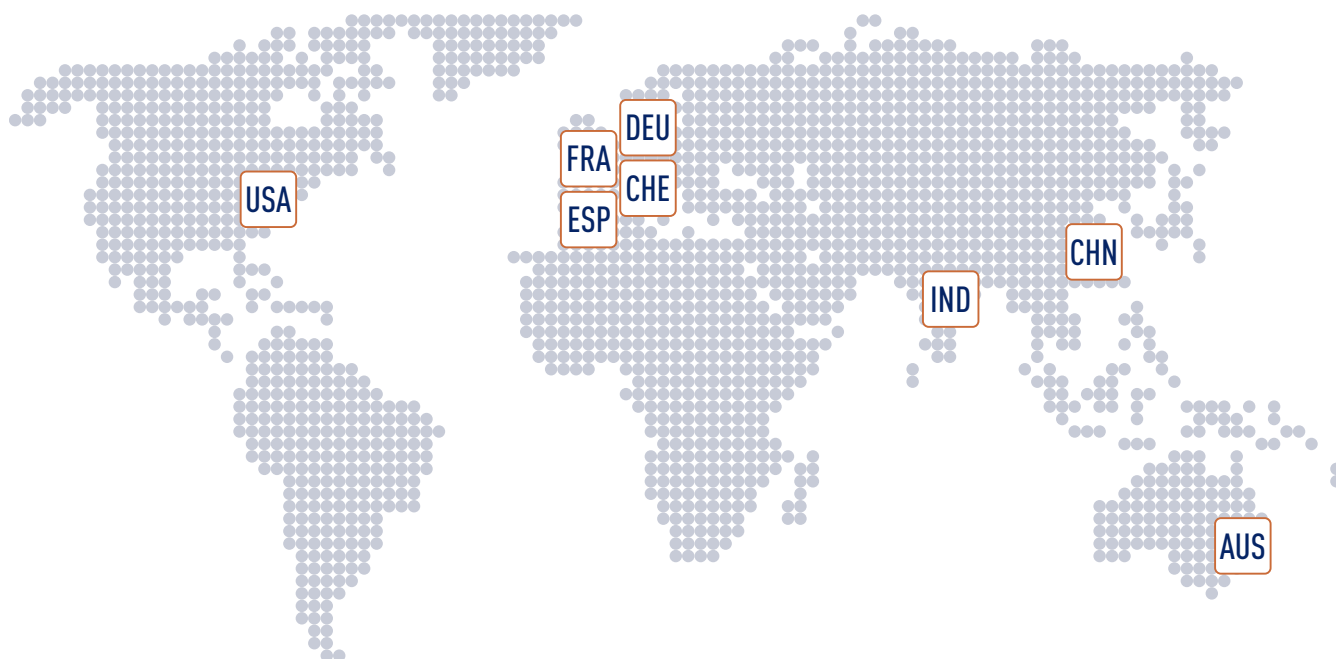

duagon | WORLDWIDE

duagon has a global presence with support and sales representatives across 8 countries. With three decentralized engineering and production sites, our customers take advantage of the added competence and flexibility.

www.duagon.com

SWITZERLAND (HQ)

Dietikon
Phone +41 44 743 73 00
sales@duagon.com

AUSTRALIA

Artarmon
Phone +61 2 9966 9424
sales-aus@duagon.com

CHINA

Shanghai
Phone +86 159 0077 2985
sales-chn@duagon.com

FRANCE

Gaillard
Phone +33 450 955 312
sales-fra@duagon.com

GERMANY

Nuremberg
Phone +49 911 99 335 0
sales-deu@duagon.com

INDIA

New Delhi
Phone +91 11 41 61 12 48
sales-ind@duagon.com

SPAIN

Madrid
Phone +34 917 880 610
sales-esp@duagon.com

USA

Blue Bell
Phone +1 215 542 9575
sales-usa@duagon.com