


Digital I/O board, optically isolated, 32 digital inputs and outputs, 24 V



PCI 32-bit

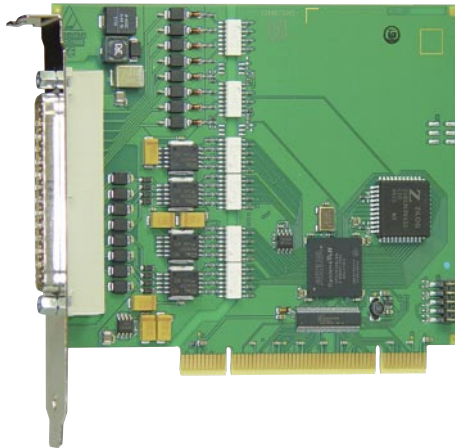

Signed 64-bit drivers
for Windows 7/Vista/XP



LabVIEW™



LabWindows/CVI™

DASYLab10
Data Acquisition System Laboratory



Features

- 3 programmable timers
- Connector compatible to the ISA board PA 1500. Connector and software compatible to the digital I/O boards APCL-1532 for the PCI Express bus and CPCL-1500 for the CompactPCI bus.
- Monitoring program for testing and setting the board functions

Inputs

- 16 optically isolated digital inputs, 24 V, including 14 interruptible inputs
- Reverse voltage protection
- All inputs are filtered

Outputs

- 16 optically isolated digital outputs, 10 V to 36 V
- Output current per channel 500 mA
- Timer programmable watchdog for resetting the outputs to „0“
- Diagnostic report through status register at short-circuits, overtemperature, voltage drop or watchdog
- Interrupt triggered through watchdog, timer, error
- At Power-On, reset of the outputs to „0“
- Short-circuit current for 16 outputs ~ 3 A typ.
- Short-circuit current per output ~1.5 A typ.
- Self-resetting fuse (electronic fuse)
- Overtemperature and overvoltage protection
- 24 V power outputs with protection diodes and filters
- Output capacitors against electromagnetic emissions
- External 24 V voltage supply screened and filtered
- Shutdown logic, when the external supply voltage drops below 5 V

Safety features

- Optical isolation 1000 V
- Creeping distance IEC 61010-1
- Protection against fast transients (burst), overvoltage, electrostatic discharge and high-frequency EMI
- Separate ground lines for inputs and outputs

APCI-1500

16 digital inputs, 24 V, including 14 interruptible inputs

16 digital outputs, 10-36 V, 500 mA/channel

Optical isolation 1000 V

Input and output filters

Watchdog, timer

At Power-On the outputs are reset to “0”

Applications

- Industrial I/O control
- PLC coupling
- Reading of encoder values for process control
- Signal switching
- Interface to electromechanical relays
- ON/OFF monitoring of motors, lights...
- Watchdog / Timer
- Machine interfacing,

Software drivers

Standard drivers for:

- Linux
- 32-bit drivers for Windows 11 / 10 / 8 / 7 / Vista / XP / 2000
- Signed 64-bit drivers for Windows 11 / 10 / 8 / 7 / XP
- Real-time use with Linux and Windows on request
- RTX drivers (real-time)

Drivers and samples for the following compilers and software packages:

- Microsoft VC++ • Microsoft C
- Borland C++ • Borland C
- Visual Basic • Delphi
- .NET on request
- LabVIEW • LabWindows/CVI • DASYLab • DiAdem

On request:

Further operating systems, compilers and samples.

Driver download: www.addi-data.com/drivers

Specifications

Digital inputs

Number of inputs:	16 (common ground acc. to IEC 1131-2)
Including interruptible inputs:	14, IRQ line selected through BIOS
Optical isolation:	Through opto-couplers, 1000 V from PC to peripheral
Compare logic:	AND and OR mode; OR priority

24 V version

Nominal voltage:	24 V
Input current at 24 V:	6 mA typ.
Logic input levels:	U nominal: 24 V
UH max.:	30 V/current 9 mA typ.
UH min.:	19 V/current 2 mA typ.
UL max.:	14 V/current 0.7 mA typ.
UL min.:	0 V/current 0 mA typ.
Signal delay:	70 µs (at nominal voltage)
Maximum input frequency:	5 kHz (at nominal voltage)

Digital outputs

Number of outputs:	16, optically isolated up to 1000 V through opto-couplers
Output type:	High-side (load to ground) acc. to IEC 1131-2
Nominal voltage:	24 V
Supply voltage:	10 V to 36 V, min. 5 V (via front connector)
Max. current for 16 outputs:	3 A typ.
Output current/output:	500 mA max.
Short-circuit current/output shutdown at 24 V, $R_{load} < 0.1 \Omega$:	1.5 A
RDS ON resistance:	0.4 Ω max.
Switch-on time:	$I_{out}=0.5 A$, load = resistance: 100 µs
Switch-off time:	$I_{out}=0.5 A$, load = resistance: 60 µs
Overttemperature (shutdown):	170 °C (output driver)
Temperature hysteresis:	20 °C (output driver)

Safety

Shutdown logic:	When the ext. 24 V voltage drops below 5 V: The outputs are switched off.
Diagnostics:	Status bit or interrupt to the PC
Timer:	3
Watchdog:	Timer-programmable, 10 µs to 37 s


EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the norm from the EN 61326 series (IEC 61326). The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.

Physical and environmental conditions

Dimensions:	131 x 99 mm
System bus:	PCI 32-bit 3.3/5 V acc. to specification 2.1 (PCISIG)
Space required:	1 PCI slot
Operating voltage:	+5 V, $\pm 5\%$ from the PC
Current consumption:	400 mA typ. $\pm 10\%$
Front connector:	37-pin D-Sub male connector
Temperature range:	0 to 60 °C (with forced cooling)

Simplified block diagram

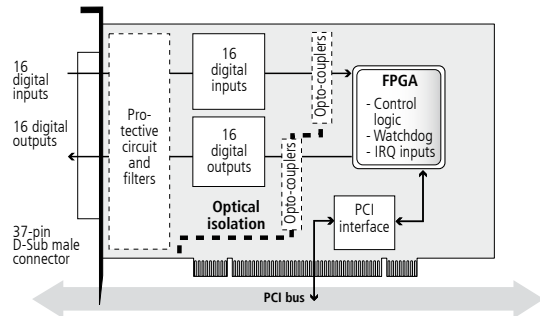


Pin assignment – 37-pin D-Sub male connector

1	Dig. input 1	20	Dig. input 2
2	Dig. input 3	21	Dig. input 4
3	Dig. input 5	22	Dig. input 6
4	Dig. input 7	23	Dig. input 8
5	Dig. input 9	24	Dig. input 10
6	Dig. input 11	25	Dig. input 12
7	Dig. input 13	26	Dig. input 14
8	Dig. input 15	27	Dig. input 16
9	24 V ext.	28	24 V ext.
10	(Inputs) 0 V ext.	29	(Outputs) 0 V ext.
11	Dig. output 1	30	Dig. output 2
12	Dig. output 3	31	Dig. output 4
13	Dig. output 5	32	Dig. output 6
14	Dig. output 7	33	Dig. output 8
15	Dig. output 9	34	Dig. output 10
16	Dig. output 11	35	Dig. output 12
17	Dig. output 13	36	Dig. output 14
18	Dig. output 15	37	Dig. output 16
19	Diagnostic output		

ADDI-DATA connection


Example 1

Connection of the inputs and outputs through screw terminal panels



Example 2

- Connection of the inputs through screw terminal panel PX901-DG
- Connection of the outputs through relay output board PX8500-G cascaded in 16 relays

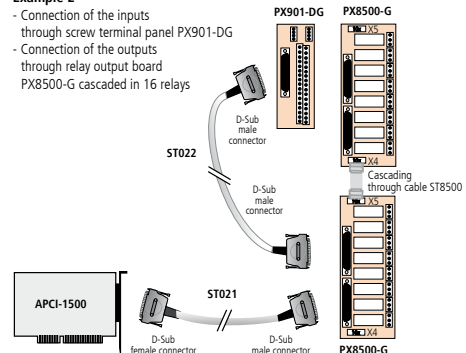

Ordering information

APCI-1500

Digital I/O board, optically isolated, 32 digital inputs and outputs, 24 V, Incl. technical description, software drivers and monitoring program.

APCI-1500: Digital I/O board, opt. isolated, 32 dig. I/O,
24 V inputs, outputs 10 to 36 V

Accessories

PX901-D: Screw terminal panel, LED status display
PX901-DG: Screw terminal panel, LED status display, for DIN rail

PX9000: 3-row screw terminal panel for DIN rail, LED status display
PX8500-G: Relay output board for DIN rail, cascable
ST010: Standard round cable, shielded, twisted pairs, 2 m
ST011: Standard round cable, shielded, twisted pairs, 5 m
ST010-S: Same as ST010, for high currents (separate 24 V supply)
ST021: Round cable between APCI-1500 and PX8500-G, shielded, twisted pairs, 2 m
ST022: Cable between PX8500-G and PX901-DG, shielded, 2 m
ST8500: Ribbon cable for cascading two PX 8500