

Rear Mount LCD

Wide Temperature Range LCD

10.4"

Specifications




Model Name	R10L100-RMA1WT
Viewable Size Image	10.4"
Active Display Area(mm)	211.2 (H) x 158.4 (V)
Pixel Pitch(mm)	0.264 (H) x 0.264 (V)(typ.)
Number of Pixels	800 x 600
Contrast Ratio	700:1(typ.)
Display Color	16.2 M
Brightness(cd/m ²)	400(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~60(V)
Synchronization Range	
Horizontal/Vertical	31.5~46.9KHz/60~75Hz
Recommended Resolution	800 x 600@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	18W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive
System Operating Temp	-20°C~60°C
Storage temperature	-20°C~70°C

Remarks:R10L100 series= VGA input only

R10L110 series= VGA+Video Input



Mechanical Drawing

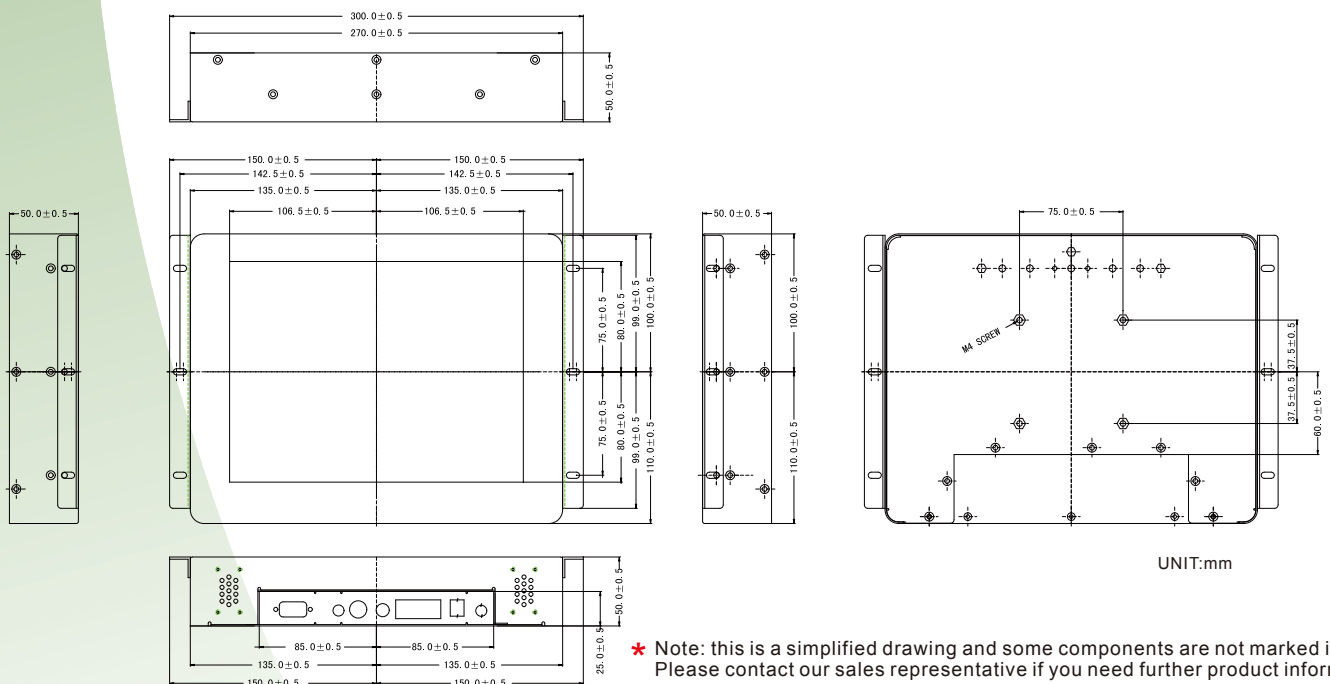

Revised Date:10-Feb-2017 V1.7