

Wide Temperature Range LCD

15"

Specifications




Model Name	R15L100-CHA3WT
Viewable Size Image	15"
Active Display Area(mm)	304.128(H)x228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	16.2M(6bits+FRC)
Brightness(cd/m ²)	400
Viewing Angle(CR>=10)	-80~80(H);-60~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	35W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW*
System Operating temp	-20°C~60°C

Remarks: R15L100 series= VGA input only

R15L110 series= VGA+Video Input



Mechanical Drawing

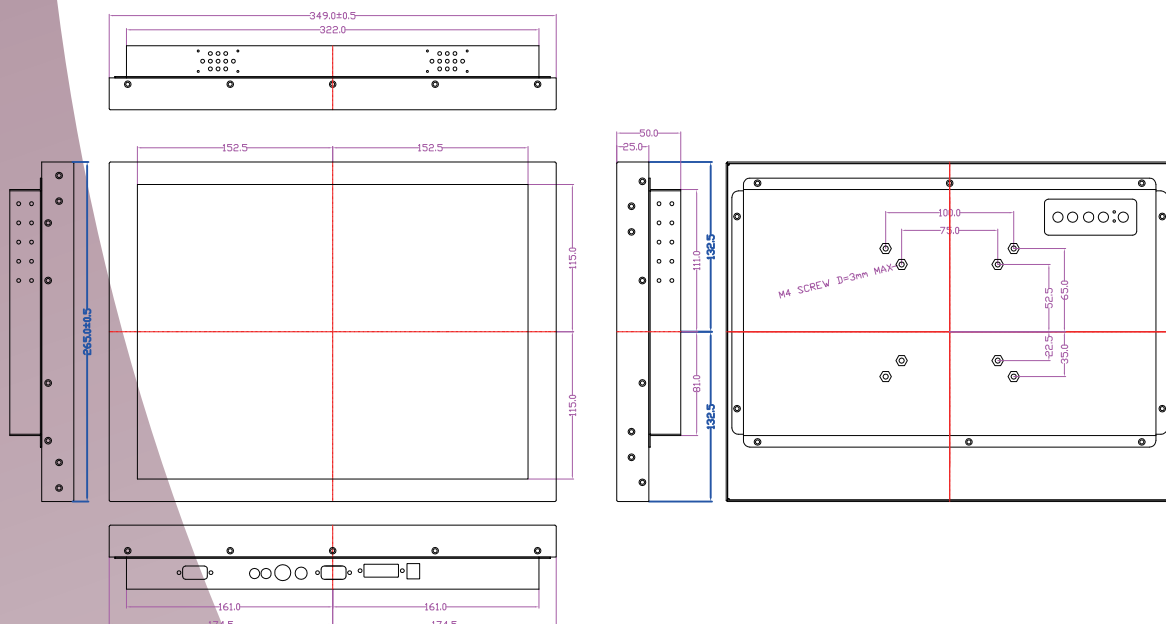

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised date: 01-Aug-2016 V1.5