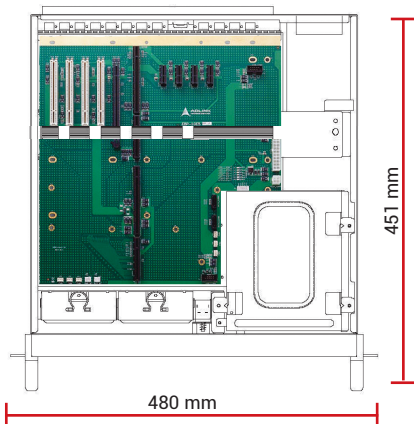


Workstation Industriali

Serie GO-402SR - Chassis per SBC 1.3



Workstation Industriale 4U
Configurato su richiesta
Burn in climatico su ogni apparato
Test Report di collaudo



Chassis


IP-259- Rev.18

Dimensioni	Chassis 4U - 480 x 177 x 451 mm
Montaggio	Rack 19"
Materiale	Acciaio pre-zincato
Architettura	Backplane passivo PICMG 1.3
Varianti	- GO-402SR: Chassis colore nero - GO-402SR-W: Chassis colore beige - GO-402SR-9007: Chassis colore silver (RAL9007)
Drives	3 x 5.25" + 1 x 3.5"
Ventilazione	2 x ventole 92mm (= 56.8 CFM cad.)
Filtri	1 filtro per l'aria rimovibile dal fronte
Led sul fronte	LED per Power e funzionalità HDD
Pulsanti	Power On/Off e System Reset
Fronte	Porta drives con serratura, connettore tastiera, 2 x USB
Retro	Alloggiamento per 14 bracket full size, 2 x COM e 1 x PS
Altro	Struttura per drives ammortizzata Barra di ritenzione schede ad altezza regolabile
Colore	Nero, beige o altri colori su richiesta
Shock	15g durata 11ms - EN 60068-2-27
Vibrazioni	10-150Hz: 1G - EN 60068-2-6
Umidità	10 - 95% non condensata
Temperatura	Operativa 0°C... +50°C Storage -20°C... +70°C


Complementi

Storage	- Dischi interni HDD / SSD / M.2 - Cassetti estraibili singoli o multipli per HDD / SSD / U.2 - Soluzioni SATA / SAS / NVMe
Media	- Masterizzatore DVD - Lettore interno CFLASH, Memory Stick, SD Card, SDHC etc. - Tastiera beige/nera italiana/inglese - Mouse ottico
Controller RAID	SATA / SAS / NVMe
Schede I/O	- Ethernet Server Adapter - GPGPU / Schede Video - Schede Multi-Head - Schede I/O Analogiche e Digitali - Schede FPGA - Schede MULTISERIALI - Frame Grabber - MIL-1553 / ARINC 429 / ARINC 418
Guide	Guide telescopiche per montaggio a rack
Sistemi Operativi	- Windows® versioni Enterprise / Embedded - Windows® versioni Server - Linux

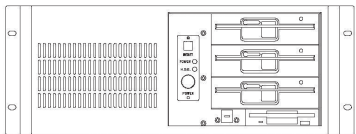Fronte









Retro

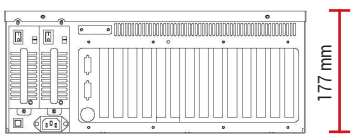

Single Board

	 ROBO-8115VG2AR	 SPCIE-C246
CPU Preferred	• W-1290E: 10C 3.5 GHz • W-1270E: 8C 3.4 GHz • W-1250: 6C 3.3 GHz • W-1250P: 6C 4.1 GHz • W-1290: 10C 3.2 GHz • W-1290P: 10C	E-2176G: 6C 3.7GHz
Chipset	Intel W480E	Intel C246
RAM	DDR4 2666 SDRAM 4x DIMM, max 128GB	DDR4 - 2666, 2 x DIMM, max.64GB w/ECC & non-ECC
Graphics	Triple independent displays by VGA on bracket (1920x1200 @ 60Hz) DVI-I on bracket (1920x1200 @ 60Hz) (VGA + DVI-D on bracket by DVI-I port) HDMI on board (4096x2160 @ 30Hz)	Dual display supported HDMI (4096 x 2304 @ 30Hz) DP (4096 x 2304 @ 60Hz)
Ethernet	2 GbE	2 GbE
SATA ports	5 x SATA 600 (support RAID 0, 1, 5, 10)	6 x SATA 600 (support RAID 0, 1, 5, 10)
M.2 slots	1x M.2 Type M 2280 (on bottom side)	PCI-E x4 M key
USB	4x USB 2.0 ports 4x USB 3.2 Gen 2 ports on board 2x USB 3.2 Gen 2 ports on bracket	4 x USB 3.2 / 7 x USB 2.0
COM	2x RS232 2x RS-232/422/485 selectable	3 x RS232 1 x RS422/485
KB/MS	1x 10 pin box header for external	1 x internal pin header
Other	Audio, on board programmable Digital I/O	Audio, 1 x Digital I/O
TPM	Yes	Yes
I/O Bracket	2 x USB 3.2, 2x GbE, 1 x DVI-I	2 x USB 3.2, 2x GbE, 1 x HDMI

Backplane

 PBPE-08P41 1 x PICMG CPU, 2 x PCI-E x16 (x8 signal), 1 x PCI-E x8 (x4 signal), 4 x PCI	 EBP-10E5 1 x PICMG CPU, 1 x PCI-E x16, 4 x PCI-E x1, 4 x PCI	 PBPE-11A3 1 x PCI-E x16 (GEN3 con Robo-8112), 2 x PCI-E x16 (x8 signal GEN3 con Robo-8112), 4 x PCI-E x8 (x1 signal), 3 x PCI-E	 PBPE-12P4 1 x PCI-E x16 (x8 signal GEN3 con Robo-8112), 2 x PCI-E x8 (x4 signal), 4 x PCI-E x4 (x1 signal), 4 x PCI	 PBPE-12A9 1 x PICMG CPU, 1 x PCI-E x16, 1 x PCI-E x8 (x4 signal), 9 x PCI	 PBPE-12AA64 1 x PICMG CPU, 1 x PCI-E x16, 8 x PCI-X, 2 x PCI
---	--	--	---	---	--

Alimentatori

AC



EN 62368

FSP600-80PSA

PS2 Single 600W

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	16A	0.1A	0.5A	4A

Input 90~264VAC Full Range

MTBF 100.000 h

Dimensioni 150x86x140 mm

AC



EN 62368

Z-HG2-5600V

PS2 Single 600W

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	45A	-	0.8A	3.5A

Input 100~240VAC Full Range

MTBF 171.848 h

Dimensioni 150x86x140 mm

AC



EN 62368

Z-MRPS2-500-2AC

PS2 Redundant 500W

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
20A	20A	40A	0.3A	0.5A	3A

Input 90V~264VAC

MTBF >100.000 h

Dimensioni 150x84x190 mm

DC



EN 62368

BES-540C

PS2 Single 400W 24VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	30A	-	0.8A	3.5A

Input 20VDC...36VDC

MTBF 121.000 h

Dimensioni 150x86x140 mm

DC



EN 62368

Z-BMRW-5360V4V

PS2 Redundant 360W 24VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	28A	-	0.8A	3.5A

Input 18VDC...36VDC

MTBF 125.331 h

Dimensioni 150x86x185 mm

DC



EN 62368

BES-540T

PS2 Single 400W -48VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	32A	-	0.8A	3.5A

Input -36VDC...-72VDC

MTBF 143.878 h

Dimensioni 150x86x140 mm

DC



EN 62368

Z-DMRW-5600V4V

PS2 Redundant 600W -48VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	45A	-	0.8A	3.5A

Input -36VDC...-72VDC

MTBF 120.000 h

Dimensioni 150x86x185 mm