

PC Industriali

Serie GO-608MB-C - Tower / Box per Motherboard






PC Box

Configurato su richiesta

Burn in climatico su ogni apparato

Test Report di collaudo

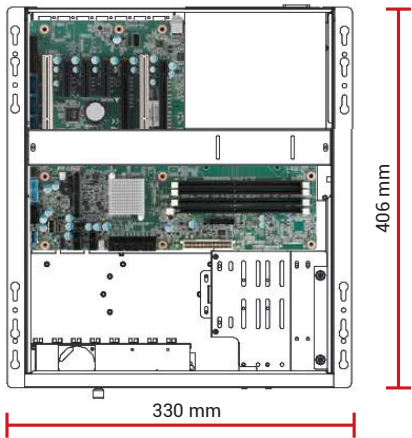

Chassis

IP-278- Rev.19

Dimensioni	PC Node - 330 x 196 x 406 mm
Montaggio	Montaggio a muro o a pannello
Materiale	Acciaio pre-zincato
Architettura	Motherboard ATX max 12" x 9.6"
Varianti	• GO-608MB-B: PC Node colore nero. Angolari per montaggio a muro o a pannello • GO-608MB-C: PC Node colore beige. Angolari per montaggio a muro o a pannello
Drives	Esterni: 1 x 5.25" max 150 mm, 2 x 3.5"; Interni: 3 x 3.5" Per i dispositivi più profondi verificare i componenti lato motherboard
Ventilazione	1 x ventola 120mm (= 85CFM)
Filtri	1 filtro per l'aria rimovibile dal fronte lavabile
Led sul fronte	LED per Power On/Off e funzionalità HDD
Pulsanti	Power On/Off, System Reset, Switch power ATX
Fronte	2 x USB, connettore PS/2
Retro	Alloggiamento per 7 bracket full size
Colore	Beige
Shock	15g durata 11ms - EN 60068-2-27
Vibrazioni	10-150Hz: 1G - EN 60068-2-6
Umidità	10 - 95% non condensata
Temperatura	Operativa 0°C... +50°C Storage -20°C... +70°C

Complementi

Storage	• Dischi interni HDD / SSD / M.2 • Cassetti estraibili singoli o multipli per HDD / SSD / U.2 • Soluzioni SATA / SAS / NVMe
Media	• Lettore interno CFLASH, Memory Stick, SD Card, SDHC etc. • Tastiera beige/nera italiana/inglese • Mouse ottico
Controller RAID	SATA / SAS / NVMe
Schede I/O	• Ethernet Server Adapter • GPGPU / Schede Video • Schede Multi-Head • Schede I/O Analogiche e Digitali • Schede FPGA • Schede MULTISERIALI • Frame Grabber • MIL-1553 / ARINC 429 / ARINC 418
Guide	Guide telescopiche per montaggio a rack
Sistemi Operativi	• Windows® versioni Enterprise / Embedded • Windows® versioni Server • Linux

Motherboard

	IMBA-ADL-Q670	IMB-M47	IMBA-ADL-H610	IMBA-Q471	IMBA-Q470	IMB-M45	IMB-M45H
CPU Preferred	• i9-14900: 24C, 2.00GHz, 65-219W • i7-14700: 20C, 2.10GHz, 65-219W • i5-14500: 14C, 2.60GHz, 65-154W • i3-14100: 4C, 3.50GHz, 60-110W • i7-13700E: 16C, 1.90GHz, 65W • i5-13500E: 14C, 4.40GHz, 65W • i3-13100E: 4C, 3.30GHz, 60W • i7-12700E: 12C, 1.60GHz, 65W • i5-12500E: 6C, 2.90GHz, 65W • i3-12100E: 4C, 3.20GHz, 60W			• i7-11700: 8C, 2.5GHz, 65W • i5-11500: 6C, 2.7GHz, 65W • i7-10700E: 8C, 2.9GHz, 65W • i5-10500E: 6C, 3.1GHz, 65W • i3-10100E: 4C, 3.2GHz, 65W		• i7-9700E: 8C, 2.6GHz, 65W • i5-9500E: 6C, 3.0GHz, 65W • i3-9100E: 4C, 3.1GHz, 65W • i7-8700: 6C, 3.2GHz, 65W • i5-8500: 6C, 3GHz, 65W • i3-8100: 4C, 3.6GHz, 65W	
Chipset	Intel Q670/Q670E	Intel Q670	Intel H610/H610E	Intel Q470/Q470E	Intel Q470E	Intel C246	Intel H310
RAM	DDR4-3200 MHz 4x DIMM max 128GB	DDR5-4400 MHz 4x DIMM max 128GB	DDR4-3200 MHz 2x DIMM max 64GB	DDR4-2933 MHz 4x DIMM max 128GB	DDR4-2933 MHz 4x DIMM max 128GB	DDR4-2666 / 2400 MHz 4x DIMM max 128GB	DDR4-2666 / 2400 MHz 2x DIMM max 64GB
Graphics	DP, HDMI, IDIM	VGA, DP, HDMI	DP, HDMI, iDPM	VGA, DP, HDMI, DP	VGA, DP, HDMI, DP Internal Type-C DP	VGA, DP, HDMI	VGA, HDMI
Ethernet	2x 2.5 GbE	3x 2.5 x GbE	1x 2.5 x GbE; 1x GbE	3x 2.5 x GbE	2x 2.5 x GbE	2x GbE	2x GbE
SATA ports	4x SATA3 (support RAID 0,1,5,10)	8x SATA3 (support RAID 0,1,5,10)	4x SATA3 (support RAID 0,1,5,10)	5x SATA3 (support RAID 0,1,5,10)	4x SATA3 (support RAID 0,1,5,10)	6 x SATA3 (support RAID 0,1,5,10)	4 x SATA3
M.2 slots	1x M.2 M key 2242/80 1x M.2 M key 2242/80	1x M.2 M-Key, up to 25110, PCIe 1x M.2 E-Key, 2230, PCIe, USB 2.0 and CNVi 1x M.2 B-Key, 3042/3052, PCIe, USB3.2 Gen1, USB 2.0 and SIM	--	1x M.2 M-key 2242 / 2280, PCIe, SATA	1x M.2 A key 2230 PCI-E x1 / USB 2.0 1x M.2 M key 2242 / 2280 PCI-E x4	--	--
USB	External 4x USB 3.2 Gen2 2x USB 3.2 Gen1 Internal 4x USB 2.0 via header 2x USB 3.2 Gen1 via header	5x USB 3.2 Gen2 1x USB 3.2 Gen2x2 (Type C) 2x USB 3.1 via header 2x USB 2.0 via header 2x vertical USB 2.0 connectors	2x USB 3.2 Gen 1 2x USB 3.2 Gen 2 4x USB 2.0 2x USB 2.0 via header	2 x USB 3.2 Gen 2 2 x USB 3.2 Gen 1 2 x USB 3.2 Gen1 via header 2 x USB 2.0 6 x USB 2.0 via header	2x USB 3.2 Gen2 2x USB 3.2 Gen1 2 x USB 3.1 Gen 1 via header 2x USB 3.0 6x USB 2.0 via header	4x USB 3.1 Gen2 connectors (rear) 2x USB 3.1 Gen1 via header 1x USB 3.1 Gen1 (vertical type A connector) 6x USB 2.0 via header 1x USB 2.0 (vertical type A connector)	4 x USB 3.0 2 x USB 2.0
COM	2x RS-232/422/485 4x RS-232	2x RS-232/422/485 4x RS-232	2 x RS-232/422/485 4 x RS-232	1 x RS-422/485 2 x RS-232	1 x RS-232/422/485 2 x RS-232	2 x RS-232/422/485 4 x RS-232	2x RS-232/455/485 4x RS-232
Other	Audio	Audio, LPT, PS2; 8x GPI, 8x GPO	Audio, Digital IO	Audio, Digital IO	Digital IO	Audio, PS2 combo, LPT, DIO	Audio, LPT, PS2 Combo, DIO
TPM	TPM 2.0	TPM 2.0	TPM 2.0	TPM 2.0	TPM 2.0	--	--
Expansion slots	1 x PCIe Gen4 x16 1 x PCIe x4 open-end slot 2 x PCIe x4 open-end slot 2 x PCIe x1, 1 x PCI	1x PCI-E x16 1x PCI-E x8 2x PCI-E x4 3x PCI-E x1	1* PCI-E x16 1* PCI-E x4 2* PCI-E x1 2* PCI	2* PCI-E x16 3* PCI-E x4 open-end 2* PCI-E x1	1* PCI-E x16 3* PCI-E x4 open-end 3* PCI	1* PCI-E x16 Or 2* PCI-E x8 + 3* PCI-E x4 2* PCI	1* PCI-E x16 1* PCI-E x4 5* PCI
I/O shield	HDMI, DP, 2x GbE, 1x RS-232/422/485, 6x USB 3.2, 1x RJ-45 for IPMI	VGA, HDMI, DP 3x 2.5GbE 2x RS-232/422/485, Audio 5x USB 3.2, 1x USB 3.2	HDMI, DP 1x GbE, 1x 2.5 GbE 2x RS-232/422/485 6x USB 3.2, 4x USB 2.0	VGA, HDMI, DP 3x 2.5GbE 1x RS-232, Audio 4x USB 3.2, 2x USB 2.0	VGA, HDMI, DP 2x 2.5GbE 1x RS-232/422/485, 2x RS-232, Audio, PS2 4x USB 3.2, 2x USB 2.0	VGA, HDMI, DP 2x GbE 2x RS-232/422/485, Audio 4x USB 3.1	VGA, HDMI 2x GbE 2x RS-232/455/485 4x USB 3.0, 2x USB 2.0 Audio, PS2 Combo

Alimentatori

AC



EN 62368

FSP600-80PSA
PS2 Single 600W

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	16A	0.1A	0.5A	4A
Input 90~264VAC Full Range					
MTBF 100.000 h					
Dimensioni 150x86x140 mm					

DC



EN 62368

BES-540C
PS2 Single 400W 24VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	30A	-	0.8A	3.5A
Input 20VDC...36VDC					
MTBF 121.000 h					
Dimensioni 150x86x140 mm					

DC



EN 62368

BES-540T
PS2 Single 400W -48VDC

Output					
+3.3V	+5V	+12V	-5V	-12V	+5VSB
25A	25A	32A	-	0.8A	3.5A
Input -36VDC...-72VDC					
MTBF 143.878 h					
Dimensioni 150x86x140 mm					