

# R15L600-RKC3

## 15" Rack Mount Display



CE

FCC

### KEY FEATURES

- 15", 1024 x 768, Rack Mount Display
- VGA and HDMI input
- Rack mount
- VESA mount

### INTRODUCTION

Winmate Rack Mount Display Series, available in sizes from 15" to 19", combines a durable rectangular design with resolutions of 1024 x 768 and 1280 x 1024. Equipped with VGA and HDMI inputs, these displays ensure seamless integration with industrial and IT systems. The rack mount and VESA mount compatibility allow for flexible installation in server racks, control rooms, and security monitoring setups. Designed for reliability, the series is ideal for demanding environments where space optimization and robust performance are essential.

### SPECIFICATIONS

#### Display

|                |                |                  |                                                                                                                          |
|----------------|----------------|------------------|--------------------------------------------------------------------------------------------------------------------------|
| Resolution     | 1024x768       | Size             | 15.0 inches                                                                                                              |
| Contrast Ratio | 2000:1         | Panel Brightness | 300.0 nits                                                                                                               |
| Display Color  | 16.2M Colors   | View Angles      | 88,88,88,88                                                                                                              |
| Active Area    | 304.1x228.1 mm | Touch / Glass    | Resistive Touch Screen<br>Protection Glass w/o Touch Function (Optional)<br>SAW Touch (Surface Acoustic Wave) (Optional) |

#### Environment

|                     |                               |                       |             |
|---------------------|-------------------------------|-----------------------|-------------|
| Operating Humidity  | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 50°C |
| Storage Temperature | -10°C to 60°C                 |                       |             |

#### Certification

|               |         |
|---------------|---------|
| Certification | CE, FCC |
|---------------|---------|

#### IO Ports

|          |                                                            |       |                                                      |
|----------|------------------------------------------------------------|-------|------------------------------------------------------|
| USB Port | 1 x USB for Touch Screen                                   | Video | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional) |
| Audio    | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional) |       |                                                      |

#### Mechanical

|           |                                   |                |                       |
|-----------|-----------------------------------|----------------|-----------------------|
| Dimension | 482 x 310 x 51.8 mm               | Mounting       | VESA Mount/Rack Mount |
| Enclosure | Metal Housing with Aluminum Bezel | Cooling System | Fanless Design        |

#### Accessory

|           |               |                    |                                                |
|-----------|---------------|--------------------|------------------------------------------------|
| Accessory | 1 x VGA cable | Optional Accessory | Remote Controller (Optional,Varies by product) |
|-----------|---------------|--------------------|------------------------------------------------|

1 x HDMI cable  
100~240V AC to DC Adapter  
Power Cord  
Manual  
VESA screws(Varies by product)


## Power

**Power Rating** 12V DC in  
24V DC in (optional)

## Control

**Button** 5 Keys: -, +, Power, Esc, Enter

## DIMENSIONS UNIT:MM

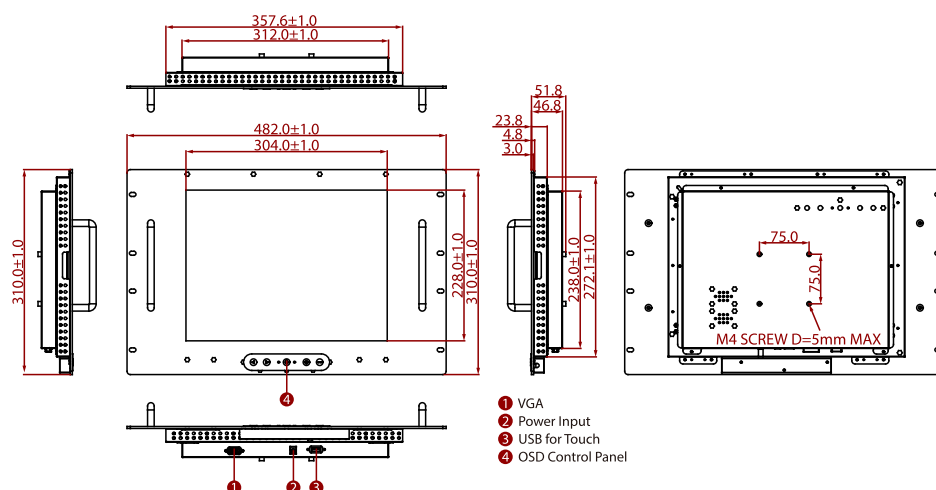

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.