RK-1 1U Keyboard Drawer

CyberView™



Benefits

- 1U keyboard drawer
- 104-key keyboard with either touchpad or trackball
- One Man installation design
- Enhanced aesthetics with molded front panel and two point lock
- 2-year standard warranty (upgradable up to 5 years)
- TAA Compliant

Product Specifications

Console Port	
KB / MS	USB interface
	Drawer end : attached 6ft USB cable x 2 Server end : USB type A x 2

Physical		
Dimensions (W x D x H)	Product	442 x 600 x 44 mm 17.4 x 23.6 x 1.73 inch
	Packing	580 x 845 x 115 mm 22.8 x 33.3 x 4.5 inch
Weight	Net	10.9 kg / 24 lb
	Gross	13.2 kg / 29 lb


* All dimensions stated are subject to change if options are selected / integrated to base model part codes


Mounting Distance	
Single console drawer / Console w/ KVM drawer	560 ~ 790 mm 22 ~ 31.1 inch


Environment	
Operating temp.	-20 to 65°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration


Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Diagrams (mm)

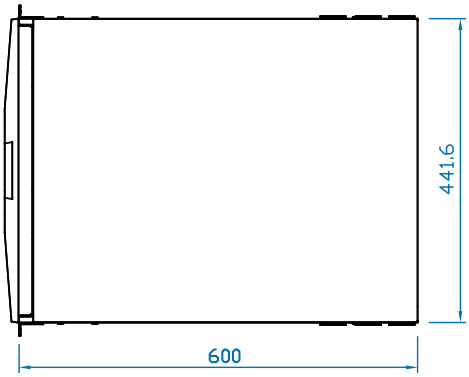





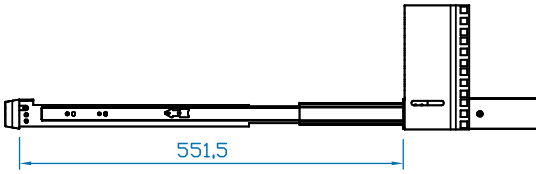

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.

RK-1 models w/ KVM

[X] stands for e or b keyboard.

HDMI KVM	IP	Remote	8-port
	0	0	RK - 801K

HDMI KVM Cable



CK - 6H (6 ft)
4K HDMI - HDMI cable



CK - 6P (6 ft)
4K HDMI - DP cable



CH - 6D (6 ft)
2K HDMI - DVI-D cable

DP KVM	IP	Remote	8-port
	0	0	RK - 801DP

DP USB KVM Cable

Resolution Support ** : 16:9 - max. 3840 x 2160
16:10 - max. 1920 x 1200



CK - 6DP (6 ft)
4K DP - DP cable

DVI-D KVM	IP	Remote	12-port
	0	0	RK - 1201D

DVI-D USB KVM Cable

Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200



CI - 6 (6 ft)
CI - 15 (15 ft)

Cat6 Matrix KVM	IP	Remote	8-port	16-port	32-port
	1	1	-	RK - MUIP1613	RK - MUIP3213
	2	1	-	RK - MUIP1624	RK - MUIP3224
	0	1	-	RK - MU1602	RK - MU3202
	0	2	-	RK - MU1603	RK - MU3203
	0	3	-	RK - MU1604	RK - MU3204

Cat6 Combo KVM	IP	Remote	8-port	16-port	32-port
	1	0	RK - UIP802	RK - UIP1602	RK - UIP3202
	0	1	RK - U802	RK - U1602	RK - U3202
	0	0	RK - U801	RK - U1601	RK - U3201

Cat6 KVM Dongle



DG - 100P
DP - USB dongle



DG - 100H
HDMI - USB dongle



DG - 100SD
DVI - USB dongle



DG - 100S
VGA - USB dongle



DG - 100
VGA - PS/2 dongle

Resolution Support : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

**** Resolution related to LCD specification**

DB-15 Combo KVM	IP	Remote	8-port	16-port
	1	0	RK - IP802	RK - IP1602
	0	1	RK - 802	RK - 1602
	0	0	RK - S801	RK - S1601

DB-15 VGA USB KVM Cable



CB - 6 (6 ft)



CB - 10 (10 ft)




CB - 15 (15 ft)


Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

Standard Keyboard

Ge G keyboard with touchpad

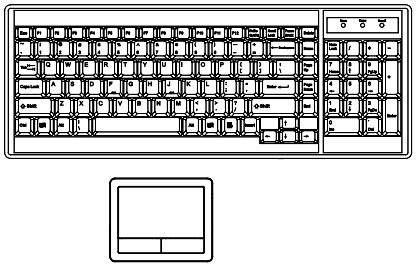

Gb G keyboard with trackball

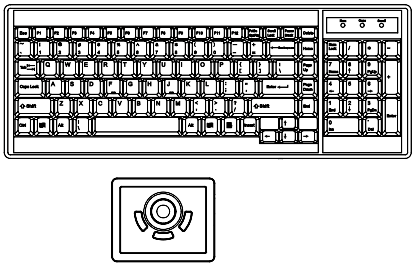

Supporting layouts

America	U.S.						
EMEA	U.K.	Germany	France	Russia	Spain	Italy	
Asia	Japan	Korea					

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication. All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.