





desktop



- 92 keys, short travel
- 50 mm IP68 trackball
- IP67 sealing

panel mount

IEC60945 MARINE ECDIS KEYBOARD

 $This \ 92 \ key backlit \, key board \, features \, a \, compact \, full \, MF \, key board \, with \, integrated \, numpad \, and \, a \, large \, 50mm \, water proof \, trackball \, with \, removable \, ball.$

MAIN FEATURES

- Certificate of Conformity fully compliant with IEC60945
- Removable 50 mm optical trackball
- High brightness LED's with fibre optics
- Illumination of the key legends and contour, the trackball contour and even customer logo's or trademarks
- Low power LED's warrant for a long life
- No external power supply necessary, keyboard port power sufficient
- Dimmable backlighting at 8 levels by two dedicated keys
- Intelligent luminosity setting of "numlock" and capslock" LED's
- White backlighting as standard, other colours on request

<u>Panel mount version</u>:

- Aluminium carrier and silicone sponge panel sealing
- Front panel mounting with holes (for countersunk M4 screws, not included)
- Added silicon sponge seal for perfect sealing into the user's panel
- The rear side components are protected by a covering metal plate
- Dimensions / weight: 385 x 185 x 50 mm / 1,2 kg

<u>Desktop version</u>:

- The keyboard is mounted in a robust, all steel enclosure
- Industrial epoxy coating (mid-grey).
- Dimensions / weight: 418 x 246 x 70 mm / 3,5 kg

GENERAL TECHNICAL SPECIFICATIONS

Sealing : IP67 sealed

Keys : 92 short travel switches, tactile feel switches

with 0,3 mm travel and 2,55 N operating force

Pointing Device : 50 mm optical trackball, epoxy resin ball

Output : 1,6 meter PS/2 or USB cable(s)
Power requirements : Directly from PS/2 or USB port

Operating temp. : 0°C to +60°C

Front layer : Black polyester front layer with embossed keys,

scratch and chemical resistant

CONNECTIVITY

The PS/2 keyboards are supplied with two 1,6 m long shielded straight cable ended with 6 pin mini DIN plugs. The USB versions are supplied with one 1,6m long shielded straight cable ended by a USB type A connector.

CUSTOMIZATION

Possible customization includes adapted backlighting controls, addition of company logo or specific function keys, different layouts, different colour.





ORDER INFO

COUNTRY LAYOUT	PANEL MOUNT	DESKTOP
US Qwerty	KSML92F0001-W-MC1	KSML92S0001-W-MC1
Cyrillic Russian Qwerty	KSML92F0007-W-MC1	KSML92S0007-W-MC1
German Qwertz	KSML92F0049-W-MC1	KSML92S0049-W-MC1

USB output

White backlighting as standard, other colours on request

^{*} Due to the increasing differences of PS/2 mouse port specifications of the various PC manufacturers, we do recommend that this unit should be tested on the final PC configuration and operating system prior to installing it in series.




KSML92-MC1







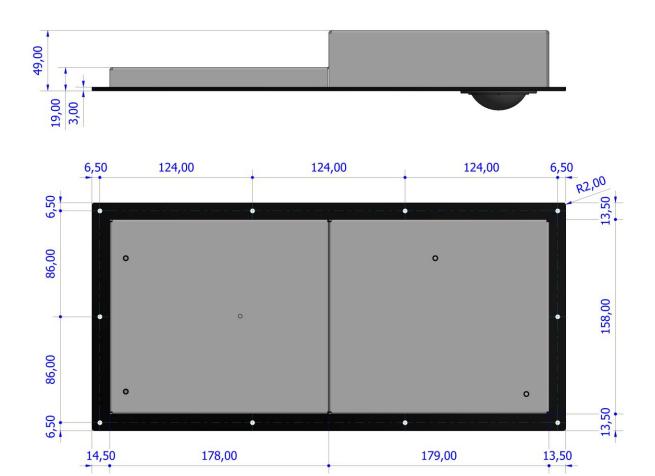

COLOURS


Keyboard & Key Background : PANTONE Black 2 C 2X Key edges & key legends : white Translucent

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.



KSML92-MC1



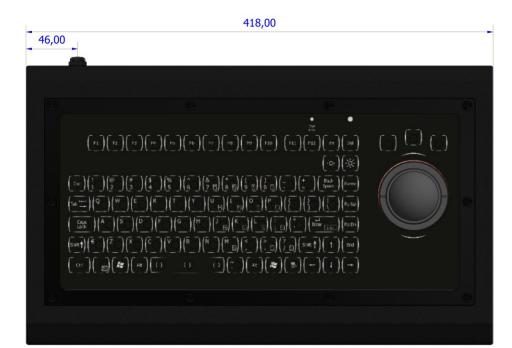





COLOURS

Keyboard & Key Background : PANTONE Black 2 C 2X Key edges & key legends : white Translucent



The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.