



**SYSR-HMIRN-01**  
5U 19" CPCI Serial R-HMI System

**GENERAL SPECIFICATIONS**

Chassis	5U 19" CPCI Serial Chassis with Dual Sections p/n CPS512M1AARE1
System Configuration	
Slot 1: GBMONIT3TN-HH	3U Chassis Management Board
Slot 2: 02G02205-256G	CPCI Serial Processor Card w/256GB SSD
Slot 3: 02G211-HH	CPCI Serial 4 x RJ45 GbE board
Slot 4-5: 02G215-HH	CPCI Serial 5 x COM board
Slot 6: CPCIS-1532-HH	CPCI Serial 16 + 16 I/O board
Slot 7	Spare CPCI Serial slot
Slot 8-9: CPS-S300-HH	CPCI Serial 300W PSU
Slot 10-11: CPS-S300-HH	CPCI Serial 300W PSU
Slot 12: 02G02205-256G	CPCI Serial Processor Card w/256GB SSD
Slot 13: 02G211-HH	CPCI Serial 4 x RJ45 GbE board
Slot 14-15: 02G215-HH	CPCI Serial 5 x COM board
Slot 16: CPCIS-1532-HH	CPCI Serial 16 + 16 I/O board
Slot 17	Spare CPCI Serial slot
Slot 18-19: CPS-S300-HH	CPCI Serial 300W PSU
Slot 20-21: CPS-S300-HH	CPCI Serial 300W PSU
Integration and Test	
System Integration and Test, including	<ul style="list-style-type: none"> <li>• Inventory List with p/n and s/n of the integrated hardware</li> <li>• Functional Test of the integrated hardware</li> <li>• Test Data Record (TDR)</li> </ul>
Environmental Specifications	
Temperature range (operation)	0..+50°C
Temperature range (storage)	-40..+75°C
Humidity	5..90%
Shock	50m/s <sup>2</sup> , 30ms
Vibration (function)	1m/s <sup>2</sup> , 5..150Hz
MTBF	TBD

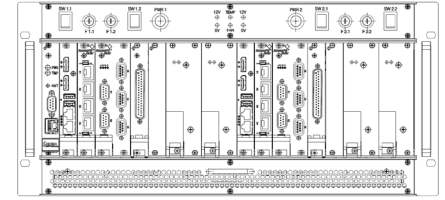

Front view

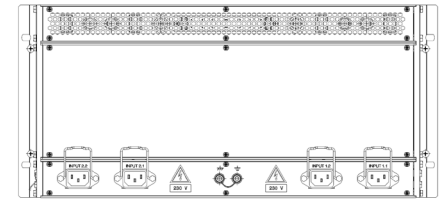

Rear view

**ORDERING INFORMATION**

<b>SYSR-HMIRN-01</b>	5U 19" CPCI Serial R-HMI System Functional Test with Test Data Record (TDR)
----------------------	--