



- Solid state sensing technology Laser tracking engine
- Sealing to IP68
- Output: PS/2 & USB or Quadrature
- Smooth operation in rugged environments
- Various top plate configurations
- Custom connector options

## 13 MM OPTICAL OEM TRACKBALLMODULE

Utilizing the latest and most advanced laser optical tracking technology, the X13 laser optical Trackerball™ is an extremely high specification, contact-less device, ideal for the most demanding of cursor control applications.

The laser tracking engine provides accurate cursor motion at all speeds and on virtually any ball, combining the benefits of solid state sensing (no moving parts except the ball). The design incorporates a removable top ring as standard to allow for easy cleaning, decontamination, sterilisation and maintenance - ensuring continued optimum performance and operation under the harshest of conditions. The X13 trackballs are available with a variety of electrical outputs, tracking force options, and sealing capabilities up to Ip68. The trackball has been designed to be back of panel mounted as part of OEM keyboards and consoles.

#### GENERAL TECHNICAL SPECIFICATIONS

**Mechanical** 

Weight 15 grams

Ball Epoxy Resin, 12,7 mm

Tracking Force 10 grams Nominal - damper ring

10 - 30 grams - rubber seal

Ball Load 50N Maximum downward pressure (5 Kg) for 2 mins.

Resolvable Ball Speed 40 Inches/sec.

Housing Material Polycarbonate (Lexan®LS2 lens grade) / ABS

Transducer Optical Navigation Technology (solid state sensing)

Mounting Position All angles (Dependant on top plate arrangement)

<u>Electrical</u>

Supply voltage 4.4V to 5.25V D.C.

Supply current 23mA typical, 25mA maximum

Resolution 300 counts per ball revolution @ 1 IPS (inches per second) +/- 10%

600 counts per ball revolution @ 5 IPS (inches per second) +/- 10% 8 Way, right-angled JST film connector, part no: 08FM-1.0SP-1.9-TF

Laser safety class Embedded class 1M laser safety, IEC 60825-1

**Environmental** 

Output connector

 Operating temperature
 0°C to +55°C (IEC 60068-2-1, IEC60068-2-2)

 Storage temperature
 -40°C to + 85°C (IEC 60068-2-1, IEC60068-2-2)

 Operating humidity
 93% RH @ 40°C, non-condensing (IEC 60068-2-78)

 Storage humidity
 10%-95% non-condensing (IEC 60068-2-78)

Vibration 5g, 10-500Hz, 1 octave/min, 10 sweep cycles (IEC 60068-2-6)

Operating Shock 15g/11ms, ½ sine, 3 shocks in +ve and -ve direction, all 3 axes (IEC 60068-2-27)

Mechanical lifetime 1 million ball revolutions

MTBF in excess of 80,000 hours (MIL-STD-217F)


ESD 15kV air-discharge and 8kV contact discharge (IEC 61000-4-2)
EMC Radiated immunity - limits according to level 3 of IEC 61000-4-3


Radiated emissions to EN55022 class B

Sealing capability IP68 (BS EN 60529)



## DIMENSIONAL DRAWING

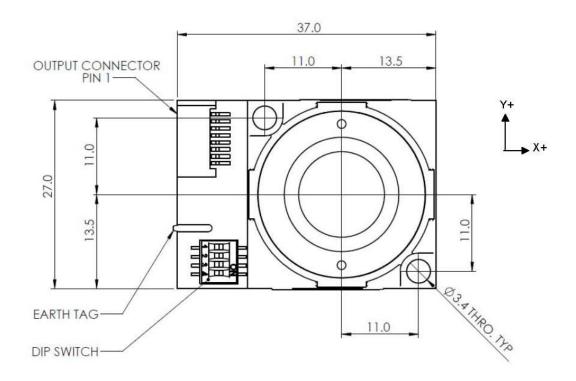

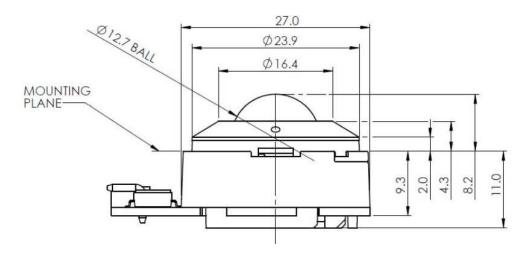

Dimensional drawing specifies factory default orientation. All dimensions are in mm unless otherwise stated. Tolerances +/-0.2mm unless otherwise stated Please note that an IGES model is available on request. Please contact your local sales office for more information.

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.



## CONNECTION DETAILS QUADRATURE OUTPUT

Output Connector: P1

Description: header 8 way FM 1.0mm pitch

Manufacturer: JST (or equivalent)
Part No: 08FM-1.0SP-1.9-TF

Mating connector: Flexible flat cable (FFC), 1.0mm pitch

Pin Number	Quadrature
1	+5V DC
2	X1
3	X2
4	Y1
5	Y2
6	0V
7	Not used

# Pin Number PS/2 & USB 1 +5V DC 2 D-, PS/2 Data 3 D+, PS/2 Clock 4 Right Switch 5 Left Switch 6 0V 7 Middle Switch

N.C.

8


# CONNECTION DETAILS PS/2 - USB OUTPUT

Output Connector: P1

Description: header 8 way FM 1.0mm pitch

Manufacturer: JST (or equivalent)
Part No: 08FM-1.0SP-1.9-TF

Mating connector: Flexible flat cable (FFC), 1.0mm pitch

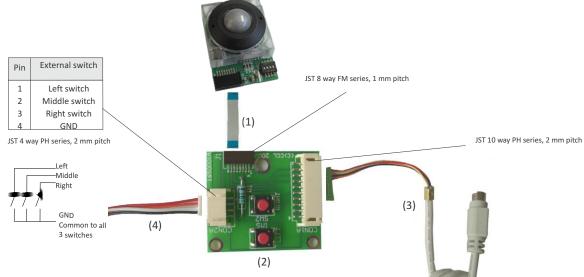

# OPTIONAL ASSEMBLIES

Standard lead & PCB assemblies for connection to the X13 unit are available. Other assemblies can also be supplied to customer specifications.

Part Number	Leads / Adapters	Description	
			(.)
1151-00	Flexlead	Flexlead interconnection cable, 12 cm long	(1)
T1601126	PCB	Interconnection PCB	(2)
OC5010160	Output cable USB	1,6 m shielded cable with USB type A plug	(3)
OC6010160	Output cable PS/2	1,6 m shielded cable with 6 pin mini DIN plug	(3)
IC040035	Switch Input	4 way JST style - bare wires, 35 cm long	(4)



#### CONFIGURATION

The X13 Series trackball provides features that may be selected using the DIP switch located on the printed circuit board. This table details the assigned function of each switch.


#### **DIP Switch Functions**

DIP Switch	Function	OFF	ON
1	Orientation 1 Setting	See Figure.1	See Figure.1
2	Orientation 2 Setting	See Figure.1	See Figure.1
3	Factory setting	N/A	N/A
4	Not used	N/A	N/A

Factory default setting: All DIP switches OFF

#### Orientation

The orientation function allows the user to mount the X13 Series trackball device in one of four positions (see figure. 1 below). The orientation of the device is determined by the direction in which the output connector is facing (when viewed from the top of Trackerball device). The Tracker ball orientation can be selected to accommodate customer requirements for connector location and wiring.



Switch 1 Orientation 1	Off	On	Off	On	
Switch 2 Orientation 2	Off	Off	On	On	

Figure.1 Mounting Orientations

# ORDER INFO

OUTPUT	DAMPER RING	RUBBER SEAL
Quadrature	X13-70021D-K	X13-70022D-K
PS/2 & USB	X13-76021D-K	X13-76022D-K

Please add corresponding output cable to the X13 trackball module see page 3  $\,$ 





damper ring rubber seal

# MANUFACTURER

Cursor Controls Ltd, Brunel Drive, Newark, U.K

Tel: ++44 (0) 1636 615600 Fax: ++44 (0) 1636 615601

Website: www.cursorcontrols.com E-mail: sales@cursorcontrols.com



### **EUROPEAN SALES & SERVICE CENTER**

NSI bvba, Haakstraat 1A, B-3740 Bilzen, Belgium Tel.: +32 89 51 90 00

Fax: +32 89 91 90 09

Website: www.nsi-be.com E-mail: info@nsi-be.com

