

AMC534

Altera Stratix® V GT FPGA, 100G



AMC534

Key Features

- Altera Stratix® V GT FPGA in FFG-1517 package
- Dual zQSFP+ Ports to the front panel
- Front panel Port 0 at 100G, Port 1 at up to 40G
- AMC Ports 4-7 and 8-11 are routed to FPGA per AMC.1, AMC.2 and AMC.4 (protocols such as PCIe, SRIO, XAUI, XLAUI, etc. are FPGA programmable)
- Onboard Freescale QorIQ PPC2040 with DDR3
- FPGA can load via Flash or via the P2040
- FPGA Flash can be programmed via the JTAG or the P2040

Benefits

- 100G performance through one port and up to 40G performance in the 2nd port via the front panel
- Distributed processing with local P2040 processor provides more reliability, performance and eliminates a potential single-point-of-failure in the system
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION

AdvancedMC™



AMC534

The AMC534 is an FPGA with dual zQSFP+ connectors offering 100G performance (Port 0 at 100G, Port 1 up to 40G) via the front panel. The module is compliant to AMC.1, AMC.2, and/or AMC.4 specifications.

The onboard, re-configurable FPGA interfaces directly to the AMC FCLKA and TCLK A-D. It also has four DDR3 memory channels (32-bit wide each) with 1 GB per channel, giving 4 GB total memory. This allows for large buffer sizes to be stored during processing as well as for queuing the data to the host.

The unit also has a quad-core P2040 that can run at 1.2 GHz with 2 GB of DDR3, 128 MB of Boot Flash, and a 32 GB SD Card. The Power Processor Control (PPC) has a x4 PCIe interface to the FPGA in addition to its local bus. The PPC has dual GbE routed to Ports 0 and 1 of the AMC.

See [Intel FPGA Solutions](#) for the advantages of using VadaTech products during application development.



Figure 1: AMC534

Block Diagram

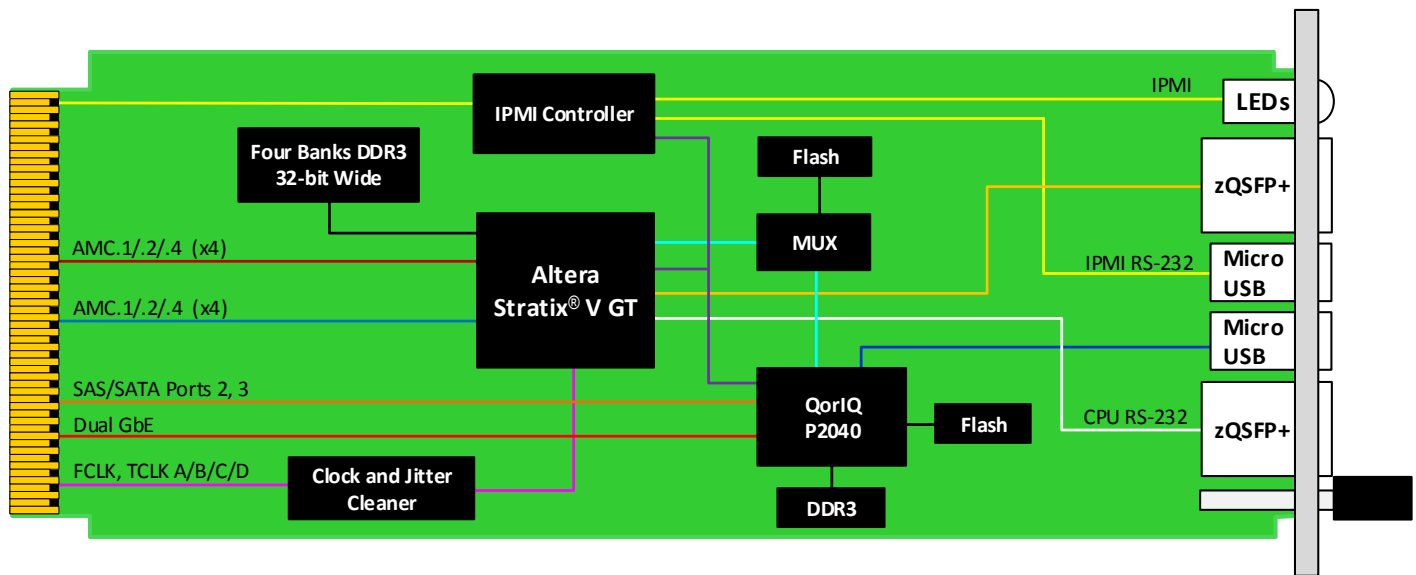


Figure 2: AMC534 Functional Block Diagram

Front Panel

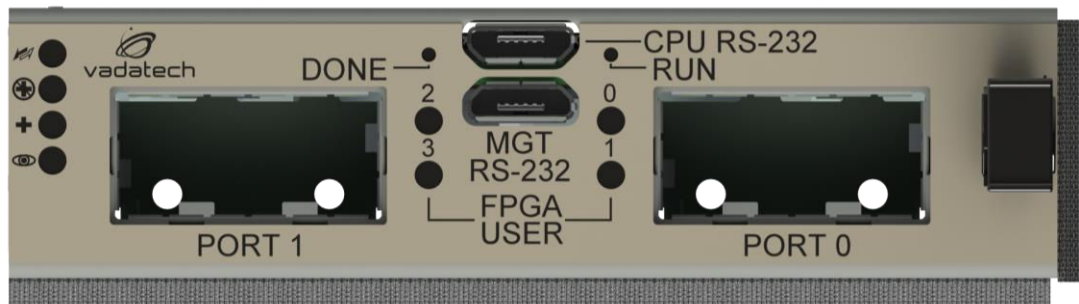


Figure 3: AMC534 Front Panel

Reference Design

VadaTech provides an extensive range of FPGA-based products. The FPGA products are in two categories; FPGA boards with FMC carriers and FPGA products with high speed ADC and DACs. The FPGA products are designed in various architectures such as AMC modules, PCIe cards and Open VPX.

VadaTech provides a reference design implementation for our FPGAs complete with VHDL source code, documentation and configuration binaries. The reference design focuses on the I/O ring of the FPGA to demonstrate low-level operation of the interconnections between the FPGA and other circuits on the board and/or backplane. It is designed to prove out the hardware for early prototyping, engineering/factory diagnostics and customer acceptance of the hardware, but it does not strive to implement a particular end application. The reference VHDL reduces customer time to develop custom applications, as the code can be easily adapted to meet customer's application requirements.

The reference design allows you to test and validate the following functionality (where supported by the hardware):

- Base and Fabric channels
- Clocks
- Data transfers
- Memory
- User defined LEDs

VadaTech provides reference VHDL for testing basic hardware functionality. The reference VHDL is provided royalty free to use and modify on VadaTech products, so can be used within applications at no additional cost. However, customers are restricted from redistributing the reference code and from use of this code for any other purpose (e.g. it should not be used on non-VadaTech hardware).

The reference VHDL is shipped in one or more files based on a number of ordering options. Not all ordering options have an impact on the FPGA and a new FPGA image is created for those options that have direct impact on the FPGA. Use the correct reference image to test your hardware. For more information, refer to the FPGA reference design manual for your device which can be accessed from the customer support site along with the reference images.

Supported Software

- Default FPGA image stored in flash memory
- Linux BSP
- Build Scripts
- Device Driver
- Reference application projects for other ordering options

The user may need to develop their own FPGA code or adapt VadaTech reference code to meet their application requirements. The supplied pre-compiled images may make use of hardware evaluation licenses, where necessary, instead of full licenses. This is because VadaTech does not provide licenses for the development tools or silicon vendor IP cores, so please contact FPGA vendor where these are required.

Specifications

Architecture		
Physical	Dimensions	Single module, mid-size (full-size optional)
		Width: 2.89" (73.5 mm)
		Depth 7.11" (180.6 mm)
Type	AMC FPGA	Altera Stratix® V GT
Memory		Four banks of DDR3 (32-bit wide)
Standards		
AMC	Type	AMC.0, AMC.1, AMC.2, AMC.3 and AMC.4 (FPGA programmable)
Module Management	IPMI	IPMI v2.0
PCIe	Lanes	Dual x4 via FPGA to AMC
SRIO	Lanes	Dual x4 via FPGA to AMC
Ethernet	GbE and 10GbE	Dual 10GbE via FPGA and dual 1000 BaseBX from PPC
Configuration		
Power	AMC534	Carrier is ~40W (without mezzanine) application specific
Environmental	Temperature	See Ordering Options and Environmental Spec Sheet
		Storage Temperature: -40° to +90°C
	Vibration	Operating 9.8 m/s ² (1G), 5 to 500 Hz on each axis
	Shock	30G each axis
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	Dual micro USB for MGT RS-232 and CPU RS-232
		Dual zQSFP+
	LEDs	IPMI management control
		Activity/Link user LEDs
	Mechanical	Hot-swap ejector handle
Software Support	Operating System	Linux, VxWorks
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty		Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

AMC534 – ABC-DEF-GHJ

A = FPGA DDR3 Memory 0 = No memory 1 = Reserved 2 = 4 GB (total)	D = FPGA Transceiver PMA Speed Grade 1 = Highest 2 = Mid	G = Clock Holdover Stability 0 = Standard XO 1 = Stratum-3 (TCXO)
B = FPGA 0 = Reserved 1 = 5SGTC5 2 = 5SGTC7 3 = Reserved 4 = Reserved	E = FPGA Speed 1 = Highest 2 = Mid	H = Temperature Range 0 = Commercial (–5° to +55°C) 1 = Industrial (–20° to +70°C) 2 = Extended (–40° to +85°C)*
C = Front Panel Size 1 = Reserved 2 = Mid-size (4 HP) 3 = Full-size (6 HP)	F = PCIe Option 0 = No PCIe 1 = PCIe on Ports 4-7 2 = PCIe on Ports 8-11 3 = PCIe on Ports 4-11	J = Conformal Coating 0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Notes:

*Conduction cooled; temperature is at edge of module. Consult factory for availability.

For operational reasons VadaTech reserves the right to supply a higher speed FPGA device than specified on any particular order/delivery at no additional cost, unless the customer has entered into a Revision Lock agreement with respect to this product.

Related Products

FMC223



- FPGA Mezzanine Card (FMC) per VITA 57
- Single module DAC 14-bit @ 2.5 GSPS (AD9739)
- 2 Vpp differential Analog output swing

UTC020



- Single module, full-size per AMC.0
- Dual -36V DC to -75V DC input, 936W (available in 468W)
- Hot-swappable with support for power module redundancy

VT899



- MTCA System Platform 5" x 7U x 9" deep (with handles 10" deep)
- Up to six AMCs: 6 full-size single-width or 3 full-size double width
- High-speed routing on 26 layers

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 5.2 – FEB/20