# RP-W119

## Drawer Features & Display Benefits

- 1U 19" widescreen LCD drawer with DVI-D / VGA input
- Short depth design of 460mm ( 18.1" )
- Sliding LCD allowing LCD to remain open when the rack door is closed
- Enhanced aesthetics with molded front panel and two point lock

## Options

- 3G / HD / SD-**SDI** Broadcast-grade input
- S-Video + Composite ( BNC )
- HDMI or Audio input
- DC power : 12V / 24V / 48V / 125V / 250V




**Basic I/O : VGA and DVI-D**

**Options : HDMI, Audio, S-Video + BNC**
**SDI**

**** For the above options, casing depth will be extended from 460mm ( 18.1" ) to 530mm ( 20.9" )**

## Specifications

- **LCD Panel**

| | |
|---|---|
| Manufacturer : | SAMSUNG |
| Size (diagonal) : | 19" widescreen TFT |
| Max resolution : | 1440 x 900 |
| Brightness (cd/m2) : | 300 |
| Backlight : | CCFL |
| Colors : | 16.7M |
| Contrast ratio (typ) : | 1000 : 1 |
| Viewing angle (H/V) : | 160° x 160° |
| Active area (mm) : | 408 x 255 |
| MTBF (hrs) : | 50,000 |
| Video input : | VGA or DVI-D |

- **Speaker :** Built-in Dual Stereo Speakers
( HDMI only ) 2W x 2
- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz
- **Power Consumption**

| | |
|---|---|
| Sreen on : | Max. 25W |
| Power saving mode : | Max. 4W |
| Power button on : | Max. 1W |

- **Environmental**

| | |
|---|---|
| Operating temperature : | 0 to 55°C degree |
| Storage temperature : | -20 to 60°C degree |
| Operating humidity : | 20~90%, non-condensing |
| Storage humidity : | 5 ~90%, non-condensing |
| Operating altitude : | 16,000 ft |
| Non-operating altitude : | 40,000 ft |
| Shock : | 10G acceleration ( 11ms duration ) |
| Vibration : | 5~500Hz 1G RMS random vibration |

- **Casing Color :** Black ( RAL 9005 )
- **Regulatory**

| | |
|---|---|
| Safety : | FCC & CE certified |
| Environmental : | RoHS2 & REACH compliant |

- **Weight**

| | |
|---|---|
| Net : | 13 kgs / 28.6 lbs |
| Gross : | 17 kgs / 37.4 lbs |

- **Dimensions**

| | |
|---|---|
| Product : | 441.6 x 460 x 44 mm / 17.4 x 18.1 x 1.73 inch |
| Packing : | 588 x 758 x 120 mm / 23.1 x 29.8 x 4.7 inch |

## Diagrams ( mm )

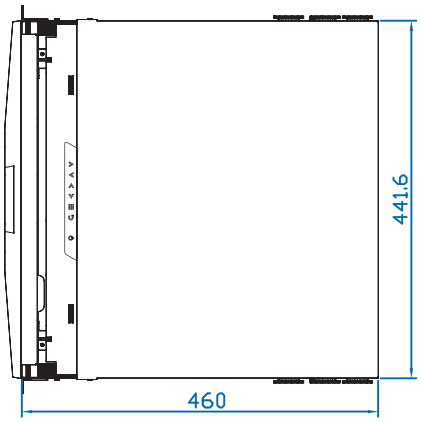


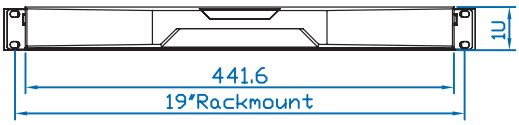





The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication. All brand names, logo and registered trademarks are properties of their respective owners.
Copyright 2017 Austin Hughes Electronics Ltd. All rights reserved.