

Wide Temperature Range LCD



12.1"


Specifications



Model Name	R12L600-IPM2WT
Viewable Size Image	12.1"
Active Display Area(mm)	245.76 (H) x 184.32(V)
Pixel Pitch(mm)	0.240(H)x0.240(V)(typ.)
Number of Pixels	1024 x 768
Contrast Ratio	700:1(typ.)
Display Color	16.2 M
Brightness(cd/m ²)	500(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)(typ.)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024 x 768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive
System Operating temp	-20°C~60°C
Storage temperature	-20°C~70°C

Remarks: R12L600 series= VGA input only
R12L630 series= VGA+Video Input

Mechanical Drawing

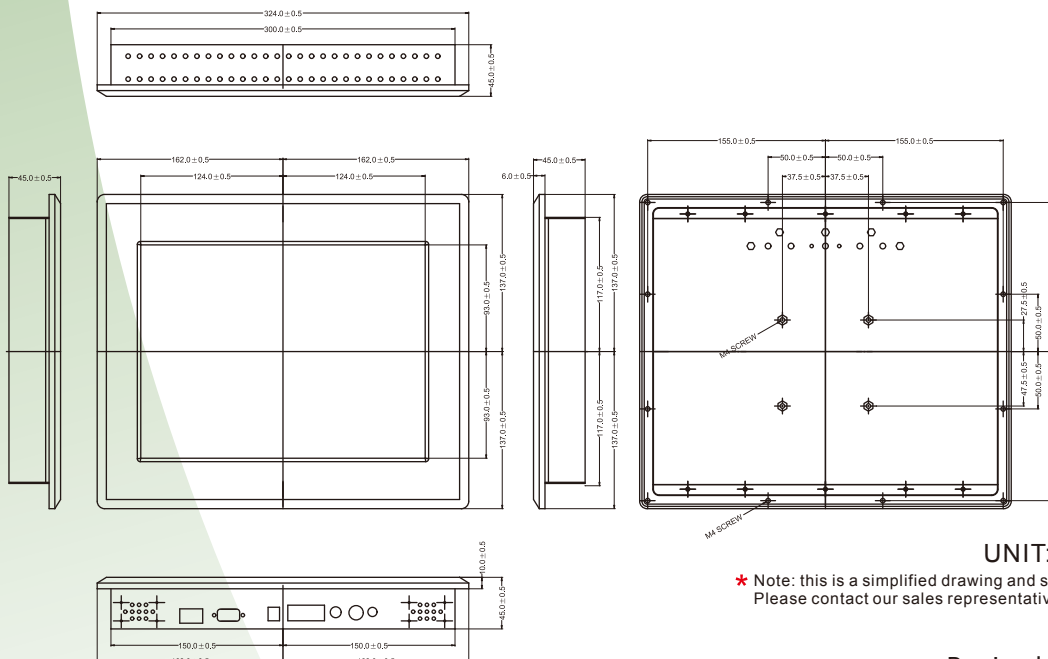

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.